



Transforming
spaces, elevating
experiences

Coquilleold Collection




Coquille

Contemporary emotion

 6 mm	 9 mm	 20 mm OUT2.0	  
120×278/48"×110" R	120×120/48"×48" R Matt-Pro 120×120/48"×48" R C2 GRIP 60×120/24"×48" R Matt-Pro 60×120/24"×48" R C2 GRIP 60×120/24"×48" R Strutt. 60×60/24"×24" R Matt-Pro 60×60/24"×24" R C2 GRIP 30×60/12"×24" R Matt-Pro 30×60/12"×24" R C2 GRIP	60×120/24"×48" R 60×60/24"×24" R	



The collection expresses the peculiarities of limestone through a careful aesthetic elaboration: we enriched the surface with calibrated graphic signs, such as light veins and delicate fossil inclusions, which mingle with the nuances and chiaroscuro of the background. The proposal thus acquires a discreet and contemporary image, which makes it suitable for minimal and urban style projects as well as elegant and prestigious settings.

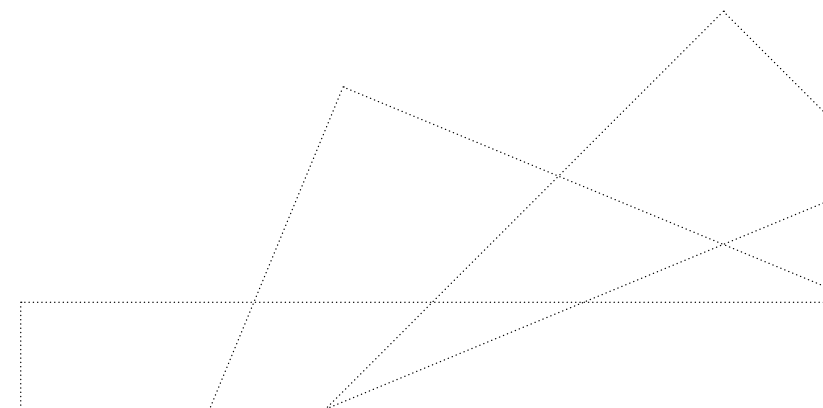



Sable 60×120/24"×48" R Strutt.

Coquille



Coquille synthesises the fascination of mineral elements and is characterised by the visual balance generated by denser areas, full of traces and graphic details, alternating with more homogeneous ones, creating a slight colour shading. The natural effect is emphasised by the choice of four nuances – *Perle*, *Gris*, *Champagne* and *Sable* – in the neutral tones of grey and beige. The surfaces can be installed as floor and wall tiles in all contexts, with single-colour solutions or even combined to create refined deshaded effects.

Perle 120×120/48"×48" R Matt-Pro — 60×120/24"×48" R Matt-Pro — Sable 60×120/24"×48" R Matt-Pro — Froid Mosaico Chevron 26×32,5/10"×12^{4/5}" R

Coquille





Four sizes are available in the new matt finish *Matt-Pro* characterised by a light texture: the hand is soft but provides excellent slip-resistance performance, enhancing its ease of cleaning. In the shades *Gris* and *Champagne* the *OUT2.0* version is also available, in two sizes. Also available in the 60×120 cm size in all colours is the new *Strutturato* finish, suitable for wall tiles: the light knurling, formed by dense, parallel lines, recalls the irregular shells and adds a special tactile perception to the product. This diverse range allows for multiple uses in architecture and interior design such as outdoor surfaces, façades, food or retail counters, bathrooms and kitchens.



Gris 120×278/48"×110" R — 120×120/48"×48" R Matt-Pro



Gris 120×278/48"×110" R

Coquille

The large slab interprets the most current trends and amplifies the potential of porcelain stoneware to create seamless surfaces. Available in the color Gris.



Champagne

120×120/48"×48" R	60×120/24"×48" R	60×60/24"×24" R	30×60/12"×24" R
Matt-Pro C2 GRIP	Matt-Pro C2 GRIP Strutturato ± 20 mm OUT2.0	Matt-Pro C2 GRIP ± 20 mm OUT2.0	Matt-Pro C2 GRIP
	 Strutturato 		

Sable

120×120/48"×48" R	60×120/24"×48" R	60×60/24"×24" R	30×60/12"×24" R
Matt-Pro C2 GRIP	Matt-Pro C2 GRIP Strutturato	Matt-Pro C2 GRIP	Matt-Pro C2 GRIP
	 Strutturato 		

Mix Chaud (Champagne + Sable)

Haut Kit 27×54/10 ^{5/8} "×21" R Matt-Pro	Mosaico Chevron 26×32,5/10"×12 ^{5/8} " R Matt-Pro
	

Gris

120×278/48"×110" R	120×120/48"×48" R	60×120/24"×48" R	60×60/24"×24" R	30×60/12"×24" R
	Matt-Pro C2 GRIP	Matt-Pro C2 GRIP Strutturato ± 20 mm OUT2.0	Matt-Pro C2 GRIP ± 20 mm OUT2.0	Matt-Pro C2 GRIP
		 Strutturato 		

Perle

120×120/48"×48" R	60×120/24"×48" R	60×60/24"×24" R	30×60/12"×24" R
Matt-Pro C2 GRIP	Matt-Pro C2 GRIP Strutturato	Matt-Pro C2 GRIP	Matt-Pro C2 GRIP
	 Strutturato 		

Mix Froid (Gris + Perle)

Haut Kit 27×54/10 ^{5/8} "×21" R Matt-Pro	Mosaico Chevron 26×32,5/10"×12 ^{5/8} " R Matt-Pro
	

Tiles

V3
Moderate



Champagne 120×120/48"×48" R Matt-Pro **OX80**
120×120/48"×48" R C2 GRIP **OX85**
60×120/24"×48" R Matt-Pro **RB91**
60×120/24"×48" R C2 GRIP **RB95**
60×120/24"×48" R **OUT2.0** **RC15**
60×60/24"×24" R Matt-Pro **RB99**
60×60/24"×24" R C2 GRIP **RC03**
60×60/24"×24" R **OUT2.0** **RC17**
30×60/12"×24" R Matt-Pro **RC07**
30×60/12"×24" R C2 GRIP **RC11**



Gris 120×278/48"×110" R **RF33**
120×120/48"×48" R Matt-Pro **OX81**
120×120/48"×48" R C2 GRIP **OX86**
60×120/24"×48" R Matt-Pro **RB92**
60×120/24"×48" R C2 GRIP **RB96**
60×120/24"×48" R **OUT2.0** **RC16**
60×60/24"×24" R Matt-Pro **RC00**
60×60/24"×24" R C2 GRIP **RC04**
60×60/24"×24" R **OUT2.0** **RC18**
30×60/12"×24" R Matt-Pro **RC08**
30×60/12"×24" R C2 GRIP **RC12**



Perle 120×120/48"×48" R Matt-Pro **OX82**
120×120/48"×48" R C2 GRIP **OX87**
60×120/24"×48" R Matt-Pro **RB93**
60×120/24"×48" R C2 GRIP **RB97**
60×60/24"×24" R Matt-Pro **RC01**
60×60/24"×24" R C2 GRIP **RC05**
30×60/12"×24" R Matt-Pro **RC09**
30×60/12"×24" R C2 GRIP **RC13**



Sable 120×120/48"×48" R Matt-Pro **OX83**
120×120/48"×48" R C2 GRIP **OX88**
60×120/24"×48" R Matt-Pro **RB94**
60×120/24"×48" R C2 GRIP **RB98**
60×60/24"×24" R Matt-Pro **RC02**
60×60/24"×24" R C2 GRIP **RC06**
30×60/12"×24" R Matt-Pro **RC10**
30×60/12"×24" R C2 GRIP **RC14**

Wall coverings

Coquille

V3
Moderate



Champagne 60×120/24"×48" R Strutt. **RA55**



Gris 60×120/24"×48" R Strutt. **RA54**



Sable 60×120/24"×48" R Strutt. **RA53**



Perle 60×120/24"×48" R Strutt. **RA56**

Gris 60×120/24"×48" R Strutt.









Perle 120×120/48"×48" R Matt-Pro — 60×120/24"×48" R Matt-Pro — Froid Mosaico Chevron 26×32,5/10"×12^{4/5}" R



The decorations offer unprecedented tiling opportunities, emphasising the elegant character or enhancing the material qualities of the product. *Chevron* is a herring bone application available in two colour combinations, *Gris* and *Perle (Froid)* or *Sable* and *Champagne (Chaud)*: thanks to the specific features of the material, the module with a classic taste acquires a contemporary personality. *Haut* plays with three-dimensionality by superimposing in a staggered way a light square size over another one, but wider and darker. There are two colour variants: *Froid, Perle* on *Gris* or *Chaud, Champagne* on *Sable*.

Mosaics



V3
Moderate



Chaud Mosaico Chevron
26×32,5/10"×12^{4/5}" R Matt-Pro RA41



Froid Mosaico Chevron
26×32,5/10"×12^{4/5}" R Matt-Pro RA42

Chevron Froid is composed of pieces in the Gris and Perle colours randomly mixed.


Decori/Decorative Motif/Decors/
Dekore/Decoraties/Decoraciones



Froid Haut Kit
27×54/10^{5/8}"×21" R Matt-Pro RC80



Chaud
27×54/10^{5/8}"×21" R Matt-Pro RA43

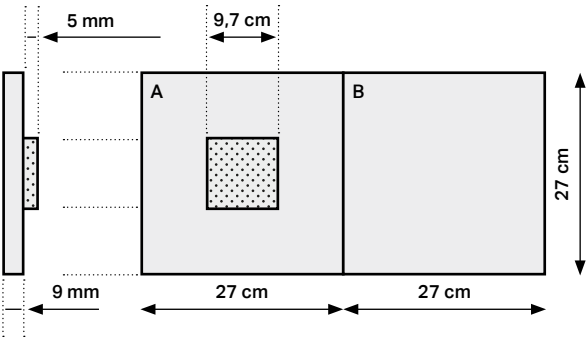


The Haut kit consists of two modules – A and B. A module is formed by two overlapped square pieces: the smallest one is laid with an "offset" technique that uses a patented system of grooves cut into the back of the stoneware. The resulting module is supplied already assembled. There are two colour variants: Haut Chaud with Sable plain tile and Champagne upper square; Haut Froid with Gris plain tile and Perle upper square. Module B is provided in the same colour as the plain tile of Module A.

Haut Kit Chaud 27×54/10^{5/8}"×21" R



Trim tiles




Battiscopa 	7×60/2^{7/8}×24" R	
	Champagne	RB29
	Gris	RB30
	Perle	RB31
	Sable	RB32

Imballi/Packing/Emballage/Verpackungseinheiten/Verpakking/Embalajes

	pcs x box	m² / m x box	kg x box	box x pallet	m² x pallet	kg x pallet
120×278/48"×110"	1	3,3360	49,56	18	60,05	892,08
120×120/48"×48"	2	2,8800	59,00	20	57,60	1180,00
60×120/24"×48"	2	1,4400	29,50	35	50,40	1032,50
60×60/24"×24"	3	1,0800	21,36	40	43,20	854,40
30×60/12"×24"	7	1,2600	24,50	40	50,40	980,00
60×120/24"×48" OUT2.0	1	0,7200	32,50	35	25,20	1137,50
60×60/24"×24" OUT2.0	2	0,7200	32,40	30	21,60	972,00
Haut Kit 27×54/10 ^{5/8} ×21" R (mix 2)	5	0,7290	14,95	22	16,04	328,90
Mosaico Chevron 26×32,5/10"×12 ^{4/5} "	6	0,5070	20,60	54	27,38	1112,40
7×60/2 ^{7/8} ×24" Battiscopa	10	6,0000	9,00	70	420,00	630,00

Stonalizzazione/Color shading/Denuancement/Farbabweichung/
Kleurnuanceringen/Destonificación



The moderate chro-matic variation and the veining of the product is an intrinsic feature to re-create the random-ness and richness of the colour shading of natural stones to which the collection is inspired. For these reasons, we recommend installing the product choosing tiles from different boxes in order to guarantee a variable and natural random effect of the finished surface. Due to these intrinsic features of the product, the col-ours represented in this catalogue must only be considered an example of the many possible colour shades.

Features

Matt-Pro

					
UNI EN ISO 10545-14	DIN EN 16165:2023 Annex B (previously DIN 51130)	DIN EN 16165:2023 Annex A (previously DIN 51097)	BS EN 16165:2021 Annex C (previously BS 7976-2:2002)	B.C.R.A. Rep. CEC/81	ANSI A326.3 (BOT 3000) Test Method
Classe 5 / Class 5	R10	A+B	PTV ₉₆ ≥ 36 Wet	Conforme / Compliant	wet DCOF ≥ 0.50

Strutturato

				
UNI EN ISO 10545-14	DIN EN 16165:2023 Annex B (previously DIN 51130)	DIN EN 16165:2023 Annex A (previously DIN 51097)	BS EN 16165:2021 Annex C (previously BS 7976-2:2002)	ANSI A326.3 (BOT 3000) Test Method
Classe 5 / Class 5	R11	A+B+C	PTV ₉₆ ≥ 36 Wet	wet DCOF ≥ 0.55

C2 GRIP, OUT2.0

				
UNI EN ISO 10545-14	DIN EN 16165:2023 Annex B (previously DIN 51130)	DIN EN 16165:2023 Annex A (previously DIN 51097)	B.C.R.A. Rep. CEC/81	ANSI A326.3 (BOT 3000) Test Method
Classe 5 / Class 5	R11	A+B+C	Conforme / Compliant	wet DCOF ≥ 0.55

Certified
quality

Ceramiche Refin SpA
is ISO 9001 certified. The entire production process is subject
to strict controls for guaranteed high-quality materials.

Ceramiche Refin reserves the right to change the products
presented in this catalogue at any time.

All the intellectual property rights of this catalogue are
reserved in all countries. Translation, reproduction in print or
electronic form, and adaptation, in whole or in part, using any
means (including microfilm and photocopy formats) of the
contents of the said catalogue constitute a violation
of REFIN SpA 's copyright. The products featured in the
photographs in this catalogue are protected by current
industrial property legislation.

The information contained in this catalogue is correct
to the best of our knowledge, but is not to be construed as
legally binding. We reserve the right to make change as and
when production requirement under them necessary. Weight,
colours and Size are subject to the usual variation expected in
fi red ceramic products. Colours shown are as close to the
real colour as the limitation of the printing process will allow.
While being the result of carefully effected studies and tests,
these suggestions and instructions should be considered
purely indicative. The technical characteristics given in this
catalogue cancel and replace all previous characteristics in
the general catalogue and in the range catalogues.

Legenda/Legend/Légende/Legende/Legende/Leyenda
Gres Fine Porcellanato – EN 14411 ISO 13006 Gruppo Bla Annex G

		Regulation	Required standards			Refin Value
	Dimensioni/Sizes/Dimensions/ Abmessungen/Afmetingen/ Dimensiones	UNI EN ISO 10545/2	Non rettificato Not rectified	Rettificato* Rectified*		
			Lunghezza e larghezza/Length and width/Longueur et largeur/Länge und Breite/Lengte en breedte/Longitud y anchura	± 0,6 % max 2 mm	± 0,3 % max 1mm	Conforme Compliant
			Spessore/Thickness/Epaisseur/ Stärke/Dikte/Grosor	± 5 % max 0,5 mm	± 5 % max 0,5mm	Conforme Compliant
			Rettilinearità spigoli/Linearity/ Rectitude des arêtes/ Kantengeradheit/Rechtheid kanten/ Rectitud de los lados	± 0,5 % max 1,5mm	± 0,3 % max 0,8mm	Conforme Compliant
			• Ortogonalità/Wedging/ Orthogonalité/Rechtwinkligkei/ Haaksheid hoeken/Ortogonalidad	± 0,5 % max 2mm	± 0,3 % max 1,5mm	Conforme Compliant
			Planarità/Warpage/Planéité/ Ebenflächigkeit/ Vlakheid/Planitud	± 0,5 % max 2mm	± 0,4 % max 1,8mm	Conforme Compliant
	* According to ISO 13006.					
	Assorbimento acqua / Water absorption / Absorption d'eau / Wasseraufnahme / Waterabsorptie / Absorción de agua	UNI EN ISO 10545/3	≤ 0,5 %			≤ 0,2%
	Resistenza alla flessione / Flexual Strenght/Résistance à la flexion / Biegefestigkeit / Buigvastheid / Resistencia a la flexión	UNI EN ISO 10545/4	≥ 35 N/mm²			Conforme Compliant
			S ≥ 1300 N (thickness ≥ 7,5 mm)			Conforme Compliant
	Coefficiente di restituzione (COR) / Coefficient of restitution (COR) / Coefficient de restitution (COR) / Schlagfestigkeit (COR) / Restitutiecoëfficiënt (COR) / Coeficiente de restitución (COR)	UNI EN ISO 10545/5	Valore consigliato ≥ 0,55/ Recommended value ≥ 0,55/ Valeur recommandée ≥ 0,55/ Empfohlener Wert ≥ 0,55/ Aanbevolen waarde ≥ 0,55/ Ralor recomendado ≥ 0,55			Conforme Compliant
	Resistenza all'abrasione profonda / Deep abrasion resistance / Resistance à l'abrasion / Widerstand gegen Tiefenverschleiß / Weerstand tegen afschuren / Resistencia a la abrasión profunda	UNI EN ISO 10545/6	≤ 175 mm³ Solo per piastrelle non smaltate / Only for unglazed tiles			Conforme Compliant
	Resistenza all'abrasione/ Abrasion resistance/ Résistance à l'abrasion/ Abriebbeständigkeit/ Weerstand tegen afschuring/ Resistencia a la abrasión	UNI EN ISO 10545/7	PEI Solo per piastrelle smaltate / Only for glazed tiles			
	Coefficiente di dilatazione termica lineare / Coefficient of thermal linear expansion / Coefficient de dilatation thermique linear / Linearer Wärmeausdehnungskoeffizient / Lineaire thermische uitzetting / Coeficiente de dilatación termica linear	UNI EN ISO 10545/8	Metodo di prova disponibile / Tests method available / Methode d'essai disponible / Verfügbares / rüfverfahren / Testmethode beschikbaar / Método de prueba disponible			≤ 7 · 10 ⁻⁴ °C ⁻¹
	Resistenza agli sbalzi termici / Thermal shock resistance / Resistance aux ecarts de temperature / Temperatuurwisselingen / Resistencia al choque térmico	UNI EN ISO 10545/9	Nessun campione deve presentare difetti visibili / No sample must show visible defects / Aucun échantillon ne doit présenter des défauts visibles / Kein Exemplar darf sichtbare Schäden aufweisen / Geen enkel monster mag zichtbare gebreken vertonen / Ninguna muestra debe presentar defectos visibles			Conforme Compliant
	Dilatazione all'umidità / Moisture expansion / Dilatation à l'humidité / Feuchtigkeitsausdehnung / Uitzetting door vocht / Dilatación por la humedad	UNI EN ISO 10545/10	Metodo di prova disponibile / Tests method available / Methode d'essai disponible / Verfügbares / Prüfverfahren / Testmethode beschikbaar / Método de prueba disponible			≤ 0,02 % (0,2 mm/m)
	Resistenza al fuoco / Fire resistance / Résistance au feu / Brandverhalten / Brand weerstand / Resistencia al fuego	UNI EN ISO 13501-1	Dichiarare un valore / Declare a value Classe A1 oppure A _{1H} / Class A1 or A _{1H}			A1 _H
	Resistenza al gelo / Frost resistance / Résistance au gel / Frostbeständigkeit / Vorstbestandheid / Resistencia a la helada	UNI EN ISO 10545/12	Resistenti/Resistant / Resistants / Widerstandsfähig / Weerbarstig / Resistentes			Conforme Compliant

Legenda/Legend/Légende/Legende/Legende/Leyenda
Gres Fine Porcellanato – EN 14411 ISO 13006 Gruppo Bla Annex G

		Regulation	Required standards		Refin Value
	Resistenza all'attacco chimico / Chemical resistance / Résistance à l'attaque chimique / Beständigkei gegen Chemikalien / Chemische bestandheid / Resistencia al ataque químico	UNI EN ISO 10545/13			
	Resistenza ai prodotti chimici di uso domestico ed agli additivi per piscina / Resistance to household chemicals and swimming pool salts	UNI EN ISO 10545/13	Classe minima B (GB per piastrelle smaltate) / Minimum class B (GB for glazed tiles)		A
			Classe minima B (UB per piastrelle non smaltate) / Minimum class B (UB for unglazed tiles)		
	Resistenza a basse concentrazioni di acidi e alcali / Resistance to low concentrations of acids and alkalis	UNI EN ISO 10545/13	Dichiarare una classe / Declare a class Metodo di prova disponibile / Tests method available		LA
	Resistenza ad alte concentrazioni di acidi e alcali / Resistance to high concentrations of acids and alkalis	UNI EN ISO 10545/13	Dichiarare una classe / Declare a class Metodo di prova disponibile / Tests method available		HA
	Resistenza alle macchie / Stain resistance / Insensibilité aux taches / Beständigkeit gegen Fleckenbildner / Substanzen / Weerstand tegen vlekken / Resistencia a las manchas	UNI EN ISO 10545/14	UGL Dichiarare un valore / UGL Declare a value GL ≥ 3		Vedere interno See inside
	Cessione di piombo e cadmio/ Lead and cadmium discharge/ Perte de plomb et cadmium/ Abgabe von Blei und Cadmium/ Ontdaan van lood en cadmium/ Cesión de plomo y cadmio	UNI EN ISO 10545/15	Valore dichiarato / Declared value		Al limite di rilevamento / Than instrument limit
	Indicazione di resistenza allo scivolamento / Assessment of slip resistance / Indication de la résistance au glissement / Bestimmung der Trittsicherheit / Indicatie voor de slipvastheid / Indicación de resistencia al deslizamiento	DIN EN 16165:2023 Annex B (previowsly DIN 51130)	Dichiarare un valore (R) / Declare a value (R)		Vedere interno See inside
		DIN EN 16165:2023 Annex A (previowsly DIN 51097)	Dichiarare un valore (A+B+C) / Declare a value (A+B+C)		Vedere interno See inside
		BS EN 16165:2021 Annex C (previowsly BS 7976-2:2002)	Dichiarare un valore / Declare a value		Vedere interno See inside
	Coefficiente di attrito dinamico / Measurement of dynamic coefficient of friction / Mesure du coefficient de frottement dynamique / Messung des dynamischen Reibungskoeffizienten / Meting van de dynamische wrijvingscoëfficiënt / Coeficiente de rozamiento dinámico	B.C.R.A. Rep. CEC/81	Asciutto > 0,40 / Bagnato > 0,40		Vedere interno See inside
		DCOF ANSI A326.3 (BOT 3000) Test Method	Dichiarare un valore / Declare a value		Vedere interno See inside

Contact us for more information



architectural@veronagroup.co.uk

0113 519 5004

www.verona-architectural.co.uk

Lumina,
Park Approach,
Thorpe Park,
Leeds LS15 8GB

