



Transforming
spaces, elevating
experiences

Sublime Collection



Sublime

A rare beauty

± 9 mm

120×120/48"×48" R Matt
120×120/48"×48" R Strutt.
120×120/48"×48" R Lucido
60×120/24"×48" R Matt
60×120/24"×48" R Strutt.
60×120/24"×48" R Lucido
60×60/24"×24" R Matt
60×60/24"×24" R Strutt.
30×60/12"×24" R Matt
30×60/12"×24" R Strutt.


± 20 mm OUT2.0

60×120/24"×48" R
60×60/24"×24" R






In the air, a faint scent
of bread and brioches;
in the distance, carefree
voices of children; a cat slyly
watches the door of the
small bookshop open;
glasses clink, someone
toasts with a good wine.
Immersed in soft light
picturesque alleys, stately
châteaux and romantic little
squares are framed to
sketch images and feelings
of serenity, which return to
the rooms welcoming with
delicate taste and warm
familiarity. Harmony with the
slow rhythms of nature,
continuous connection
between indoor and outdoor
conveying authentic
emotions.

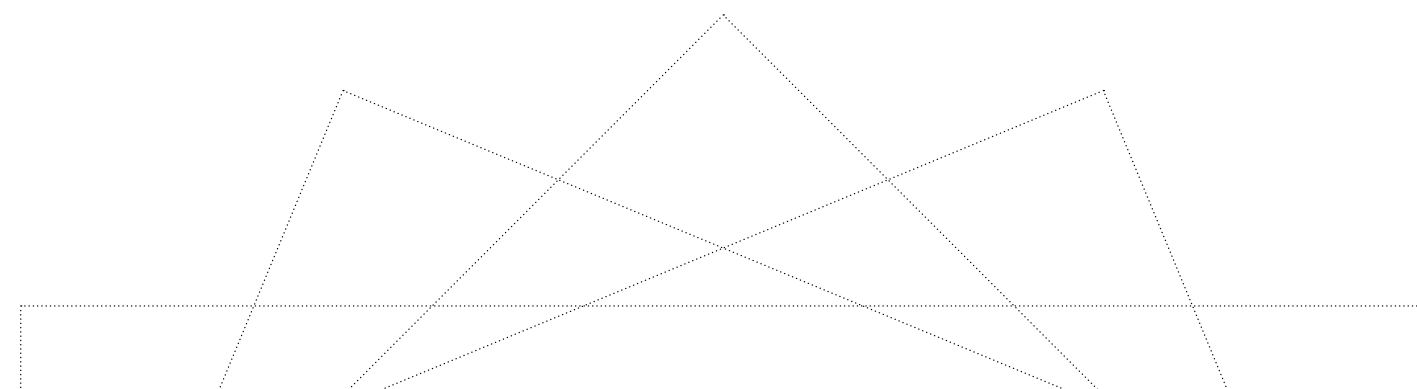




The landscapes of Burgundy inspired this collection, which captures a very rare type of local limestone origin that is now unobtainable and whose quarries have been exhausted. We visited the places and did a thorough research of materials in those territories, which we then processed in our laboratory where we developed a particular technical and creative process to recover this specificity.

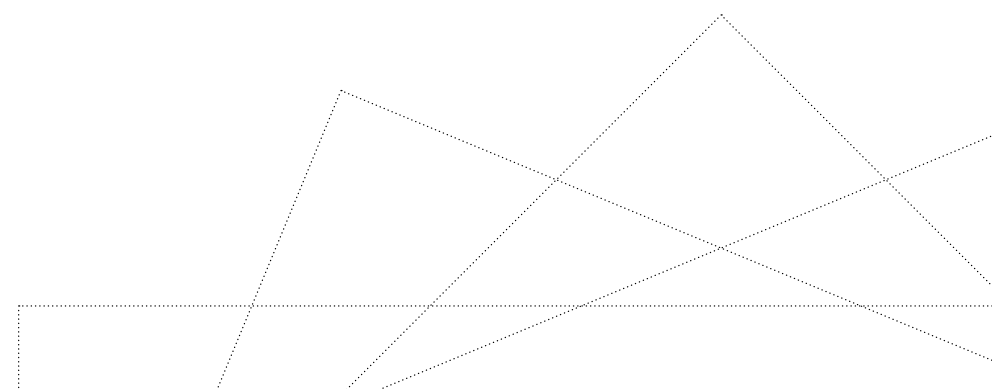

We have thus obtained a surface characterised by haloing and small details, while keeping it balanced: the fossil inclusions become very light and the typical chromatic alternations are attenuated in favour of a more compact and uniform background, furrowed by veins that, although not very contrasting, that are easy to read thanks to the slight contrasts and transitions of colours. The result is an effect of soft and refined essentiality, ideal for realizations with a contemporary language, even in all-over versions.

Beige 120×120/48"×48" R Lucido — 60×120/24"×48" R Lucido

Sublime

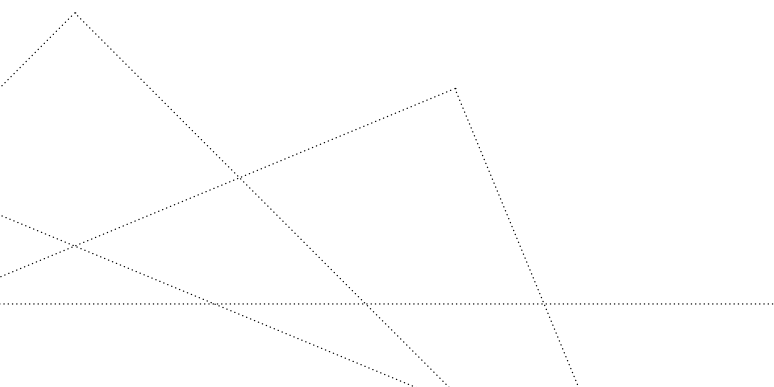





The color palette calibrated on very versatile neutral tones – Ivory, Beige, Grey –, the numerous sizes – square and rectangular – and the available finishes – Matt, Lucido, Strutturato – compose a very wide range of possibilities offering ideal solutions for interiors, both on floors and walls, and exteriors. The range is completed by two decoration proposals, both available in all three colours: Mosaico (30×30 cm) is available in finishes Matt or Structured; Plissé Mix (28×36 cm) casually mixes pieces with Matt and Structured finish.

Ivory

						Mosaico	Mosaico Plissé
120×120/48"×48"		60×120/24"×48"		60×60/24"×24"		30×60/12"×24"	
± 9 mm Matt Strutturato Lucido		± 9 mm Matt Strutturato Lucido ± 20 mm OUT2.0		± 9 mm Matt Strutturato ± 20 mm OUT2.0		± 9 mm Matt Strutturato	

Grey

						Mosaico	Mosaico Plissé
120×120/48"×48"		60×120/24"×48"		60×60/24"×24"		30×60/12"×24"	
± 9 mm Matt Strutturato Lucido		± 9 mm Matt Strutturato Lucido ± 20 mm OUT2.0		± 9 mm Matt Strutturato ± 20 mm OUT2.0		± 9 mm Matt Strutturato	

Beige

						Mosaico	Mosaico Plissé
120×120/48"×48"		60×120/24"×48"		60×60/24"×24"		30×60/12"×24"	
± 9 mm Matt Strutturato Lucido		± 9 mm Matt Strutturato Lucido ± 20 mm OUT2.0		± 9 mm Matt Strutturato ± 20 mm OUT2.0		± 9 mm Matt Strutturato	





Plain Tiles

V3
Moderate



Ivory
120×120/48"×48" R Matt
120×120/48"×48" R Strutt.
120×120/48"×48" R Lucido
60×120/24"×48" R Matt
60×120/24"×48" R Strutt.
60×120/24"×48" R Lucido
60×120/24"×48" R OUT2.0
60×60/24"×24" R Matt
60×60/24"×24" R Strutt.
60×60/24"×24" R OUT2.0
30×60/12"×24" R Matt
30×60/12"×24" R Strutt.



Grey
120×120/48"×48" R Matt
120×120/48"×48" R Strutt.
120×120/48"×48" R Lucido
60×120/24"×48" R Matt
60×120/24"×48" R Strutt.
60×120/24"×48" R Lucido
60×120/24"×48" R OUT2.0
60×60/24"×24" R Matt
60×60/24"×24" R Strutt.
60×60/24"×24" R OUT2.0
30×60/12"×24" R Matt
30×60/12"×24" R Strutt.



Beige
120×120/48"×48" R Matt
120×120/48"×48" R Strutt.
120×120/48"×48" R Lucido
60×120/24"×48" R Matt
60×120/24"×48" R Strutt.
60×120/24"×48" R Lucido
60×120/24"×48" R OUT2.0
60×60/24"×24" R Matt
60×60/24"×24" R Strutt.
60×60/24"×24" R OUT2.0
30×60/12"×24" R Matt
30×60/12"×24" R Strutt.

Ivory 120×120/48"×48" R Matt



Grey 120×120/48"×48" R Strutt.

Sublime





Ivory 120×120/48"×48" R Lucido



Ivory 60×120/24"×48" R Strutt

Sublime





V3
Moderate



Ivory Mosaico 30×30/12"×12" R Matt 30×30/12"×12" R Strutt.

OT61
OU20



Grey Mosaico 30×30/12"×12" R Matt 30×30/12"×12" R Strutt.

OT60
OU19



Beige Mosaico 30×30/12"×12" R Matt 30×30/12"×12" R Strutt.

OT59
OU18



Ivory Mosaico Plissé Mix 28×36/11"×14" R

OU15



Grey Mosaico Plissé Mix 28×36/11"×14" R

OU17



Beige Mosaico Plissé Mix 28×36/11"×14" R

OU16

Beige 120×120/48"×48" R Matt — Grey Mosaico Plissé Mix 24×36/11"×14" R

Sublime





Trim tiles



Battiscopa 	7×120/2^{7/8}×48" R	
	Ivory	OT67
	Grey	OT66
	Beige	OT65
	Ivory Lucido	OT64
	Grey Lucido	OT63
	Beige Lucido	OT62

Packing

	pcs × box	m² / m × box	kg × box	box × pallet	m² × pallet	kg × pallet
120×120/48"×48"	2	2,8800	59,00	20	57,60	1 180,00
60×120/24"×48"	2	1,4400	29,50	35	50,40	1032,50
60×60/24"×24"	3	1,0800	21,36	40	43,20	854,40
30×60/12"×24"	7	1,2600	24,50	40	50,40	980,00
60×120/24"×48" OUT2.0	1	0,7200	32,50	35	25,20	1137,50
60×60/24"×24" OUT2.0	2	0,7200	32,40	30	21,60	972,00
30×30/12"×12" Mosaico	11	0,9900	19,00	18	17,82	342,00
28×36/11 1"×14" Plissé Mosaico Mix	6	0,6048	12,00	48	29,03	576,00
7×120/2 ^{7/8} ×48" Battiscopa	6	7,2000	10,88	40	288,00	435,20

Stonalizzazione/Color shading/Denuancement/Farbabweichung/
Kleurnuanceringen/Destonificación



The moderate chro-matic variation and the veining of the product is an intrinsic feature to re-create the random-ness and richness of the colour shading of natural stones to which the collection is inspired. For these reasons, we recommend installing the product choosing tiles from different boxes in order to guarantee a variable and natural random effect of the finished surface. Due to these intrinsic features of the product, the col-ours represented in this catalogue must only be considered an example of the many possible colour shades.

Certified
quality

Ceramiche Refin SpA is ISO 9001 certified. The entire production process is subject to strict controls for guaranteed high-quality materials.

Ceramiche Refin reserves the right to change the products presented in this catalogue at any time.

All the intellectual property rights of this catalogue are reserved in all countries. Translation, reproduction in print or electronic form, and adaptation, in whole or in part, using any means (including microfilm and photocopy formats) of the contents of the said catalogue constitute a violation of REFIN SpA's copyright. The products featured in the photographs in this catalogue are protected by current industrial property legislation.

The information contained in this catalogue is correct to the best of our knowledge, but is not to be construed as legally binding. We reserve the right to make change as and when production requirement under them necessary. Weight, colours and Size are subject to the usual variation expected in fi red ceramic products. Colours shown are as close to the real colour as the limitation of the printing process will allow. While being the result of carefully effected studies and tests, these suggestions and instructions should be considered purely indicative. The technical characteristics given in this catalogue cancel and replace all previous characteristics in the general catalogue and in the range catalogues.

Features

Lucido

		
UNI EN ISO 10545/14	UNI EN ISO 10545/7	B.C.R.A. Rep. CEC/81
Conforme / Compliant	PEI IV (12000 rev) Grey PEI V (>12000 rev) Beige, Ivory	Non conforme / Failed

Matt

					
UNI EN ISO 10545/14	DIN EN 16165:2021 Annex B (previowsly DIN 51130)	DIN EN 16165:2021 Annex A (previowsly DIN 51097)	BS EN 16165:2021 Annex C (previowsly BS 7976-2:2002)	B.C.R.A. Rep. CEC/81	DCOF ANSI A326.3 (BOT 3000) Test Method
Classe 5 / Class 5	R10	A+B	PTV ≥ 0,36 Wet	Conforme / Compliant	wet DCOF ≥ 0,50

Strutturato

					
UNI EN ISO 10545/14	DIN EN 16165:2021 Annex B (previowsly DIN 51130)	DIN EN 16165:2021 Annex A (previowsly DIN 51097)	BS EN 16165:2021 Annex C (previowsly BS 7976-2:2002)	B.C.R.A. Rep. CEC/81	DCOF ANSI A326.3 (BOT 3000) Test Method
Classe 5 / Class 5	R11	A+B	PTV ≥ 0,36 Wet	Conforme / Compliant	wet DCOF ≥ 0,42

OUT2.0

					
UNI EN ISO 10545/14	DIN EN 16165:2021 Annex B (previowsly DIN 51130)	DIN EN 16165:2021 Annex A (previowsly DIN 51097)	BS EN 16165:2021 Annex C (previowsly BS 7976-2:2002)	B.C.R.A. Rep. CEC/81	DCOF ANSI A326.3 (BOT 3000) Test Method
Classe 5 / Class 5	R11	A+B+C	PTV ≥ 0,36 Wet	Conforme / Compliant	wet DCOF ≥ 0,55

For USA, Canada
and Oceania markets

Sublime is not recommended for the exterior horizontal surfaces or exterior paving, and it is not recommended for ramps application. Sublime LUCIDO is recommended for interior walls and exterior walls both in residential and commercial applications. Sublime LUCIDO finish is not recommended for floors.

Warning

The LUCIDO (Glossy) finish does not meet the minimum coefficient of friction, according to the most relevant national standards for antislip resistance (as per example: ANSI 137.1-2012 / BOT3000; b.C.R.A. REP. CEC/81; DIN 51130; DIN 51097).

Legenda/Legend/Légende/Legende/Legende/Leyenda
Gres Fine Porcellanato – EN 14411 ISO 13006 Gruppo Bla Annex G

		Regulation	Required standards			Refin Value
	Dimensioni/Sizes/Dimensions/ Abmessungen/ Afmetingen/ Dimensiones	UNI EN ISO 10545/2		Non rettificato Not rectified	Rettificato* Rectified*	
			Lunghezza e larghezza/Length and width/Longueur et largeur/Länge und Breite/Lengte en breedte/ Longitud y anchura	± 0,6 % max 2 mm	± 0,3 % max 1mm	Conforme Compliant
			Spessore/Thickness/Epaisseur/ Stärke/Dikte/Grosor	± 5 % max 0,5 mm	± 5 % max 0,5mm	Conforme Compliant
			Rettilinearità spigoli/Linearity/ Rectitude des arêtes/ Kantengeradheit/Rechtheid kanten/ Rectitud de los lados	± 0,5 % max 1,5mm	± 0,3 % max 0,8mm	Conforme Compliant
			• Ortogonalità/Wedging/ Orthogonalité/Rechtwinkligkeit/ Haaksheid hoeken/Ortogonalidad	± 0,5 % max 2mm	± 0,3 % max 1,5mm	Conforme Compliant
			Planarità/Warpage/Planéité/ Ebenflächigkeit/ Vlakheid/Planitud	± 0,5 % max 2mm	± 0,4 % max 1,8mm	Conforme Compliant
	* According to ISO 13006.					
	Assorbimento acqua / Water absorption / Absorption d'eau / Wasseraufnahme / Waterabsorptie / Absorción de agua	UNI EN ISO 10545/3	≤ 0,5 %			0,2%
	Resistenza alla flessione / Flexual Strenght/Résistance à la flexion / Biegefestigkeit / Buigvastheid / Resistencia a la flexión	UNI EN ISO 10545/4	≥ 35 N/mm²			Conforme Compliant
			S ≥ 1300 N (thickness ≥ 7,5 mm)			Conforme Compliant
	Coefficiente di restituzione (COR) / Coefficient of restitution (COR) / Coefficient de restitution (COR) / Schlagfestigkeit (COR) / Restitutiecoëfficiënt (COR) / Coeficiente de restitución (COR)	UNI EN ISO 10545/5	Valore consigliato ≥ 0,55/ Recommended value ≥ 0,55/ Valeur recommandée ≥ 0,55/ Empfohlener Wert ≥ 0,55/ Aanbevolen waarde ≥ 0,55/ Rvalor recomendado ≥ 0,55			Conforme Compliant
	Resistenza all'abrasione profonda / Deep abrasion resistance / Resistance à l'abrasion / Widerstand gegen Tiefenverschleiß / Weerstand tegen afschuren / Resistencia a la abrasión profunda	UNI EN ISO 10545/6	≤ 175 mm³ Solo per piastrelle non smaltate / Only for unglazed tiles			Conforme Compliant
	Resistenza all'abrasione/ Abrasion resistance/ Résistance à l'abrasion/ Abriebbeständigkeit/ Weerstand tegen afschuring/ Resistencia a la abrasión	UNI EN ISO 10545/7	PEI Solo per piastrelle smaltate / Only for glazed tiles			Vedere interno See inside
	Coefficiente di dilatazione termica lineare / Coefficient of thermal linear expansion / Coefficient de dilatation thermique linear / Linearer Wärmeausdehnungskoeffizient / Lineaire thermische uitzetting / Coeficiente de dilatación termica linear	UNI EN ISO 10545/8	Metodo di prova disponibile / Tests method available / Methode dessai disponible / Verfügbares / rüfverfahren / Testmethode beschikbaar / Método de prueba disponible			≤ 7 10 ⁻⁶ °C ⁻¹
	Resistenza agli sbalzi termici / Thermal shock resistance / Resistance aux ecarts de temperature / Temperaturwechselbeständigkeit / Temperatuurswisselingen / Resistencia al choque térmico	UNI EN ISO 10545/9	Nessun campione deve presentare difetti visibili / No sample must show visible defects / Aucun échantillon ne doit présenter des défauts visibles / Kein Exemplar darf sichtbare Schäden aufweisen / Geen enkel monster mag zichtbare gebreken vertonen / Ninguna muestra debe presentar defectos visibles			Conforme Compliant
	Dilatazione all'umidità / Moisture expansion / Dilatation à l'humidité / Feuchtigkeitsausdehnung / Uitzetting door vocht / Dilatación por la humedad	UNI EN ISO 10545/10	Metodo di prova disponibile / Tests method available / Methode dessai disponible / Verfügbares / Prüfverfahren / Testmethode beschikbaar / Método de prueba disponible			≤ 0,02 % (0,2 mm/m)
	Resistenza al fuoco / Fire resistance / Résistance au feu / Brandverhalten / Brand weerstand / Resistencia al fuego	UNI EN ISO 13501-1	Dichiarare un valore / Declare a value Classe A1 oppure A _{1H} / Class A1 or A _{1H}			A _{1H}
	Resistenza al gelo / Frost resistance / Résistance au gel / Frostbeständigkeit / Vorstbestandheid / Resistencia a la helada	UNI EN ISO 10545/12	Resistenti/Resistant / Resistants / Widerstandsfähig / Weerbarstig / Resistentes			Conforme Compliant

Legenda/Legend/Légende/Legende/Legende/Leyenda
Gres Fine Porcellanato – EN 14411 ISO 13006 Gruppo Bla Annex G

		Regulation	Required standards	Refin Value
	Resistenza all'attacco chimico / Chemical resistance / Résistance à l'attaque chimique / Beständigkeit gegen Chemikalien / Chemische bestandheid / Resistencia al ataque químico	UNI EN ISO 10545/13		
	Resistenza ai prodotti chimici di uso domestico ed agli additivi per piscina / Resistance to household chemicals and swimming pool salts	UNI EN ISO 10545/13	Classe minima B (GB per piastrelle smaltate) / Minimum class B (GB for glazed tiles) Classe minima B (UB per piastrelle non smaltate) / Minimum class B (UB for unglazed tiles)	A
	Resistenza a basse concentrazioni di acidi e alcali / Resistance to low concentrations of acids and alkalis	UNI EN ISO 10545/13	Dichiarare una classe / Declare a class Metodo di prova disponibile / Tests method available	LA Non valido per la finitura Lucido / Not valid for the Lucido finish
	Resistenza ad alte concentrazioni di acidi e alcali / Resistance to high concentrations of acids and alkalis	UNI EN ISO 10545/13	Dichiarare una classe / Declare a class Metodo di prova disponibile / Tests method available	HA Non valido per la finitura Lucido / Not valid for the Lucido finish
	Resistenza alle macchie / Stain resistance / Insensibilité aux taches / Beständigkeit gegen Fleckenbildner / Substanzen / Weerstand tegen vlekken / Resistencia a las manchas	UNI EN ISO 10545/14	UGL Dichiarare un valore / UGL Declare a value GL ≥ 3	Vedere interno See inside Vedere interno See inside
	Cessione di piombo e cadmio/ Lead and cadmium discharge/ Perte de plomb et cadmium/ Abgabe von Blei und Cadmium/ Ontdaan van lood en cadmium/ Cesión de plomo y cadmio	UNI EN ISO 10545/15	Valore dichiarato / Declared value	Al limite di rilevamento/ Than instrument limit
	Indicazione di resistenza allo scivolamento / Assessment of slip resistance / Indication de la résistance au glissement / Bestimmung der Trittsicherheit / Indicatie voor de slipvastheid / Indicación de resistencia al deslizamiento	DIN EN 16165:2021 Annex B (previously DIN 51130)	Dichiarare un valore (R) / Declare a value (R)	Vedere interno See inside
		DIN EN 16165:2021 Annex A (previously DIN 51097)	Dichiarare un valore (A+B+C) / Declare a value (A+B+C)	Vedere interno See inside
		BS EN 16165:2021 Annex C (previously BS 7976-2:2002)	Dichiarare un valore / Declare a value	Vedere interno See inside
	Coefficiente di attrito dinamico / Measurement of dynamic coefficient of friction / Mesure du coefficient de frottement dynamique / Messung des dynamischen Reibungskoeffizienten / Meting van de dynamische wrijvingscoëfficiënt / Coeficiente de rozamiento dinámico	B.C.R.A. Rep. CEC/81	Asciutto > 0,40 / Bagnato > 0,40	Vedere interno See inside
		DCOF ANSI A326.3 (BOT 3000) Test Method	Dichiarare un valore / Declare a value	Vedere interno See inside

• Per piastrelle rettangolari, che abbiano il lato maggiore L≥ 60 cm, e rapporto tra i lati ≥ 3, la misurazione della ortogonalità deve venire condotta solo sul lato corto.
For oblong tiles with L≥ 60 cm and ratio length/width L/W≥3, measurement of rectangularity only on short edges

WARNING: THE POLISHED (LUCIDO) SURFACE DOES NOT MEET THE MINIMUM COEFFICIENT OF FRICTION, ACCORDING TO THE MOST RELEVANT
NATIONAL STANDARDS FOR ANTISLIP RESISTANCE (AS PER EXAMPLE: ANSI 137.1-2012 / BOT3000; B.C.R.A. REP. CEC/81; DIN 51130; DIN 51097).
THEREFORE WE RECOMMEND TO USE POLISHED (LUCIDO) FINISH FOR WALL APPLICATION ONLY.

Contact us for more information



architectural@veronagroup.co.uk

0113 519 5004

www.verona-architectural.co.uk

Lumina,
Park Approach,
Thorpe Park,
Leeds LS15 8GB

