



Transforming
spaces, elevating
experiences

Canne Collection



CONTENTS


CANNÈ



THE COLORS	08
3D	10
ECRÙ	13
HONEY	19
ECRÙ BLACK	24
HONEY BLACK	30
NUT BLACK	37

APPENDIX

SERIES SUMMARY	44
TECHNICAL SHEET	47

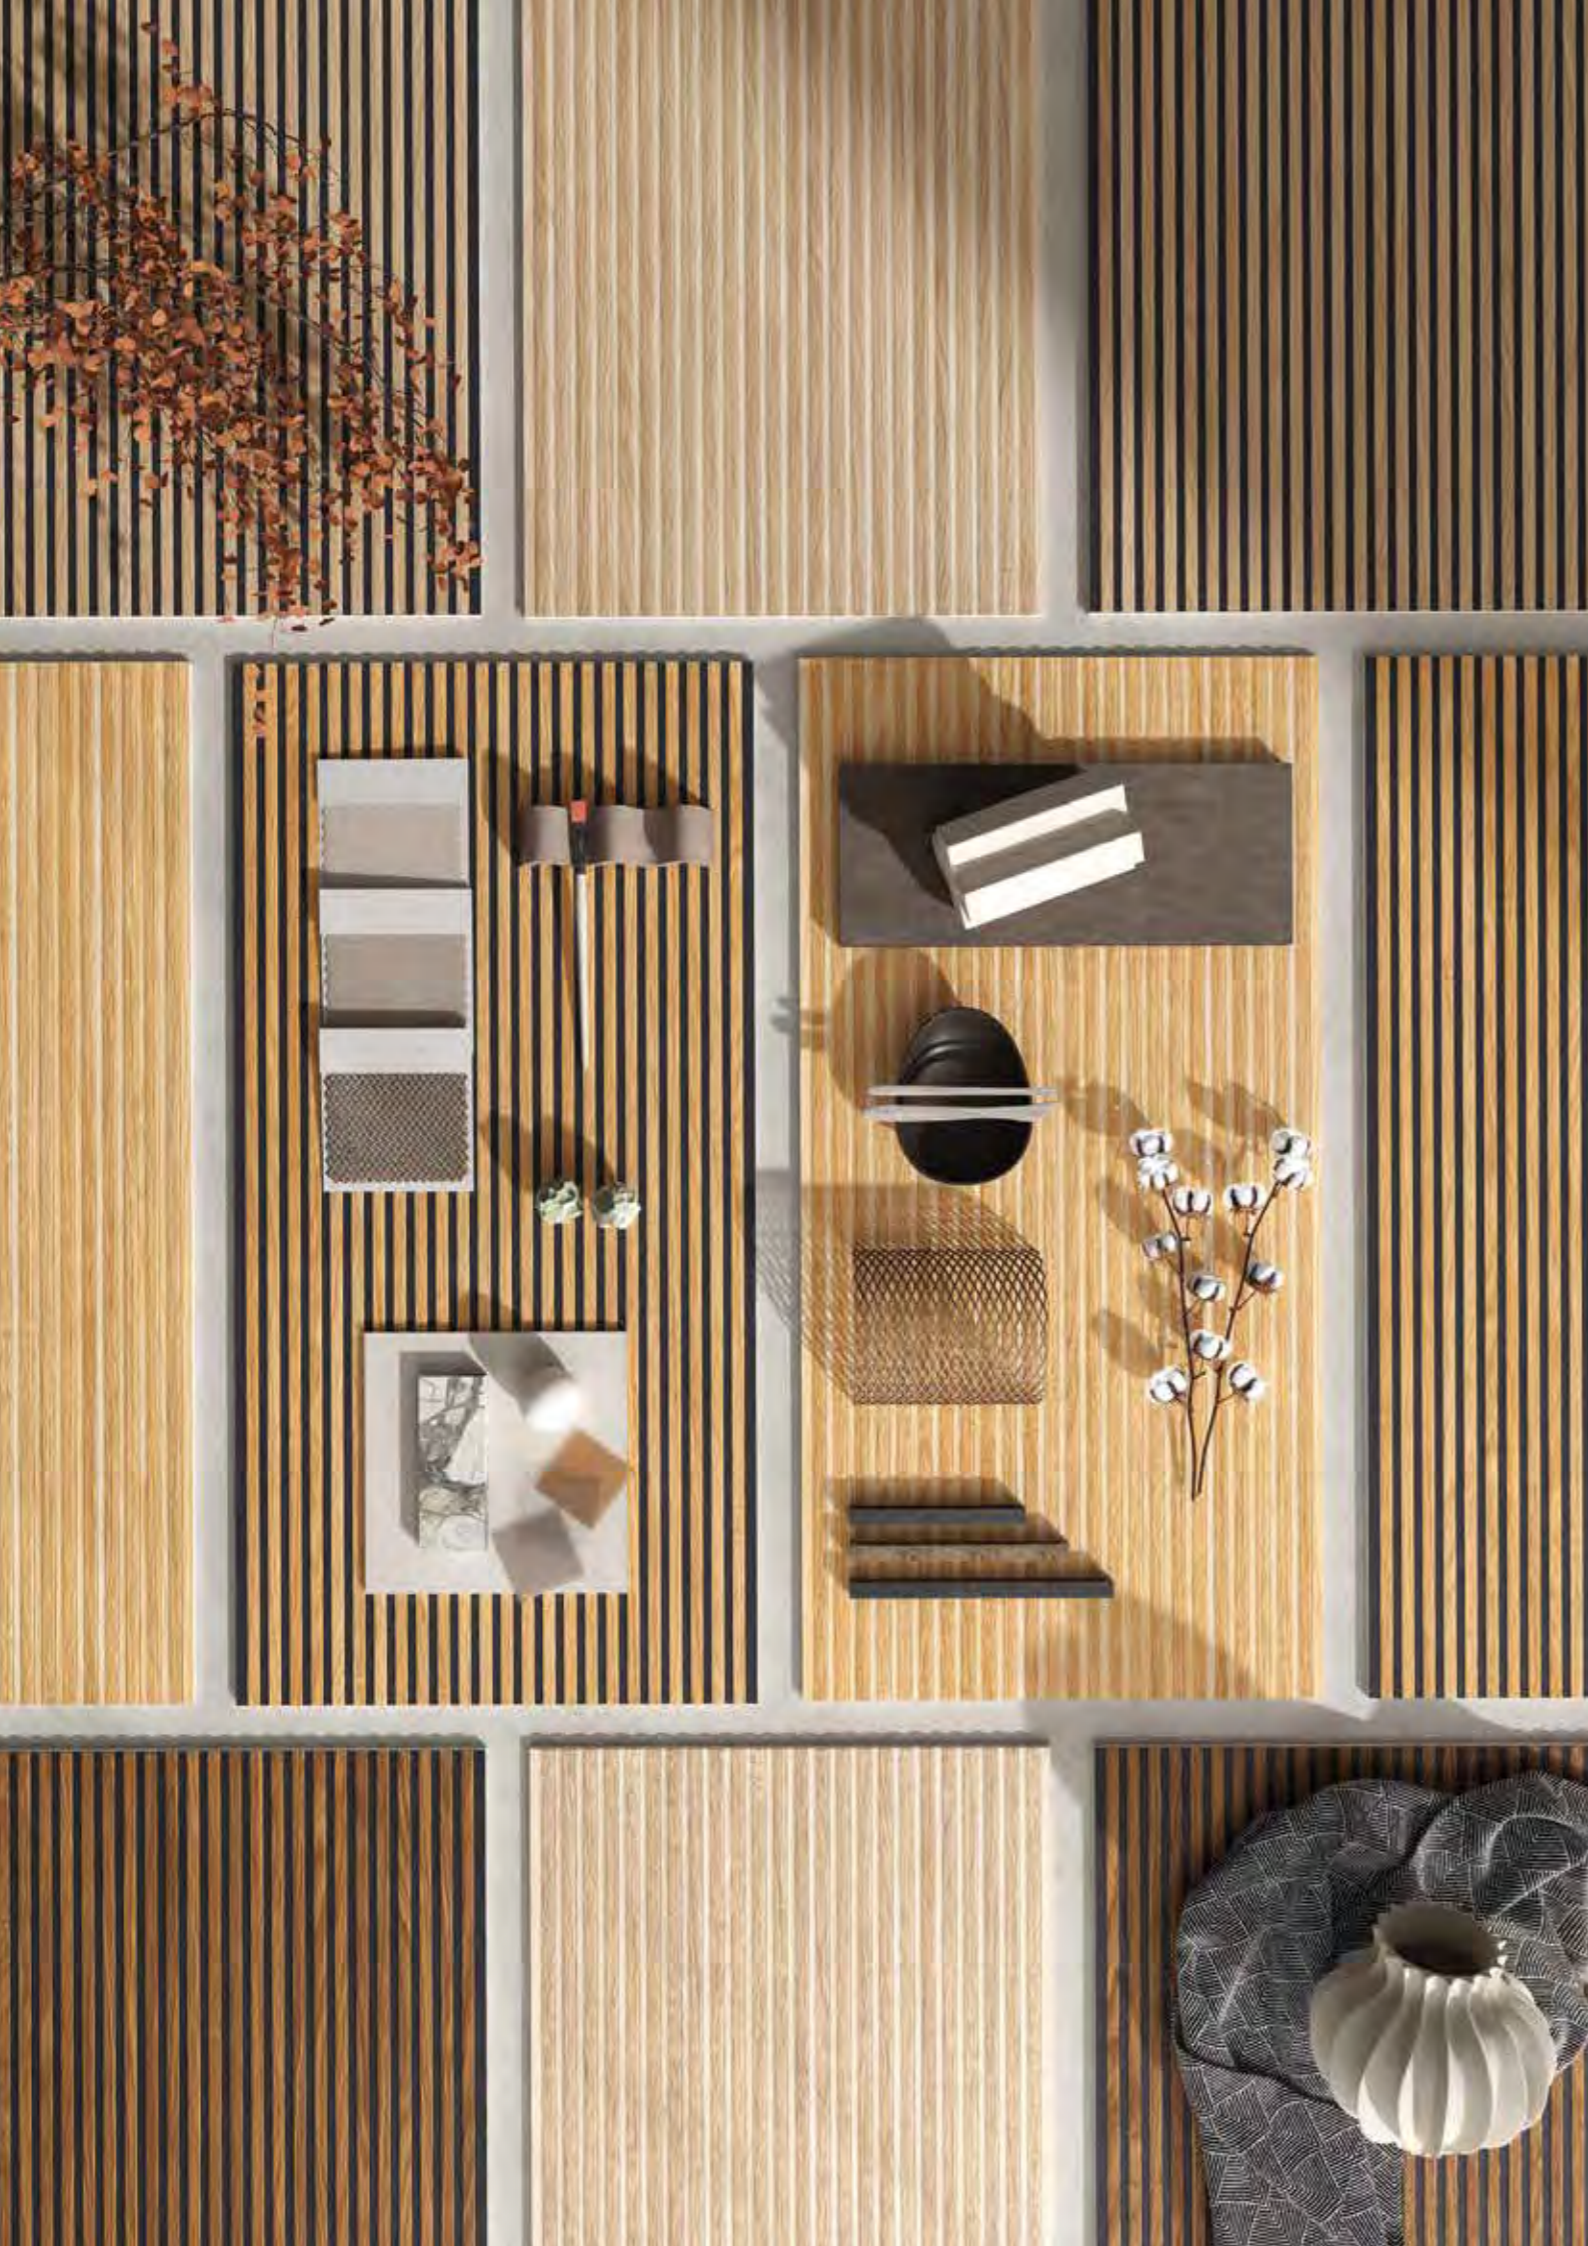


Cannè


3d
ceramic




ECRÙ




HONEY



ECRÙ BLACK



HONEY BLACK



NUT BLACK



GLAZED PORCELAIN STONEWARE



8,5 mm



60x120 rett.
24"x48" rect.




FERNANDO PESSOA

“Aesthetic perception can become a science and originality be cultivated as a discipline”


The colors

The Cannè series is available in five colour shades, each of which allows you to create free-of-convention styles. Light colours such as Ecrú and Honey represent the harmonious fusion of structure and comfort. In fact, parallel lines restore brightness to rooms making them unique and at the same time refined. Ecrú, Honey and Nut in the Black version are, on the other hand, parallel designs that create real experiences in the rooms where they play lead role. The interplay of light and dark, alternating in three-dimensional structures, creates an intimate and silent, almost intimist oasis. Also perfect for outdoors, these colour shades create true works of art.

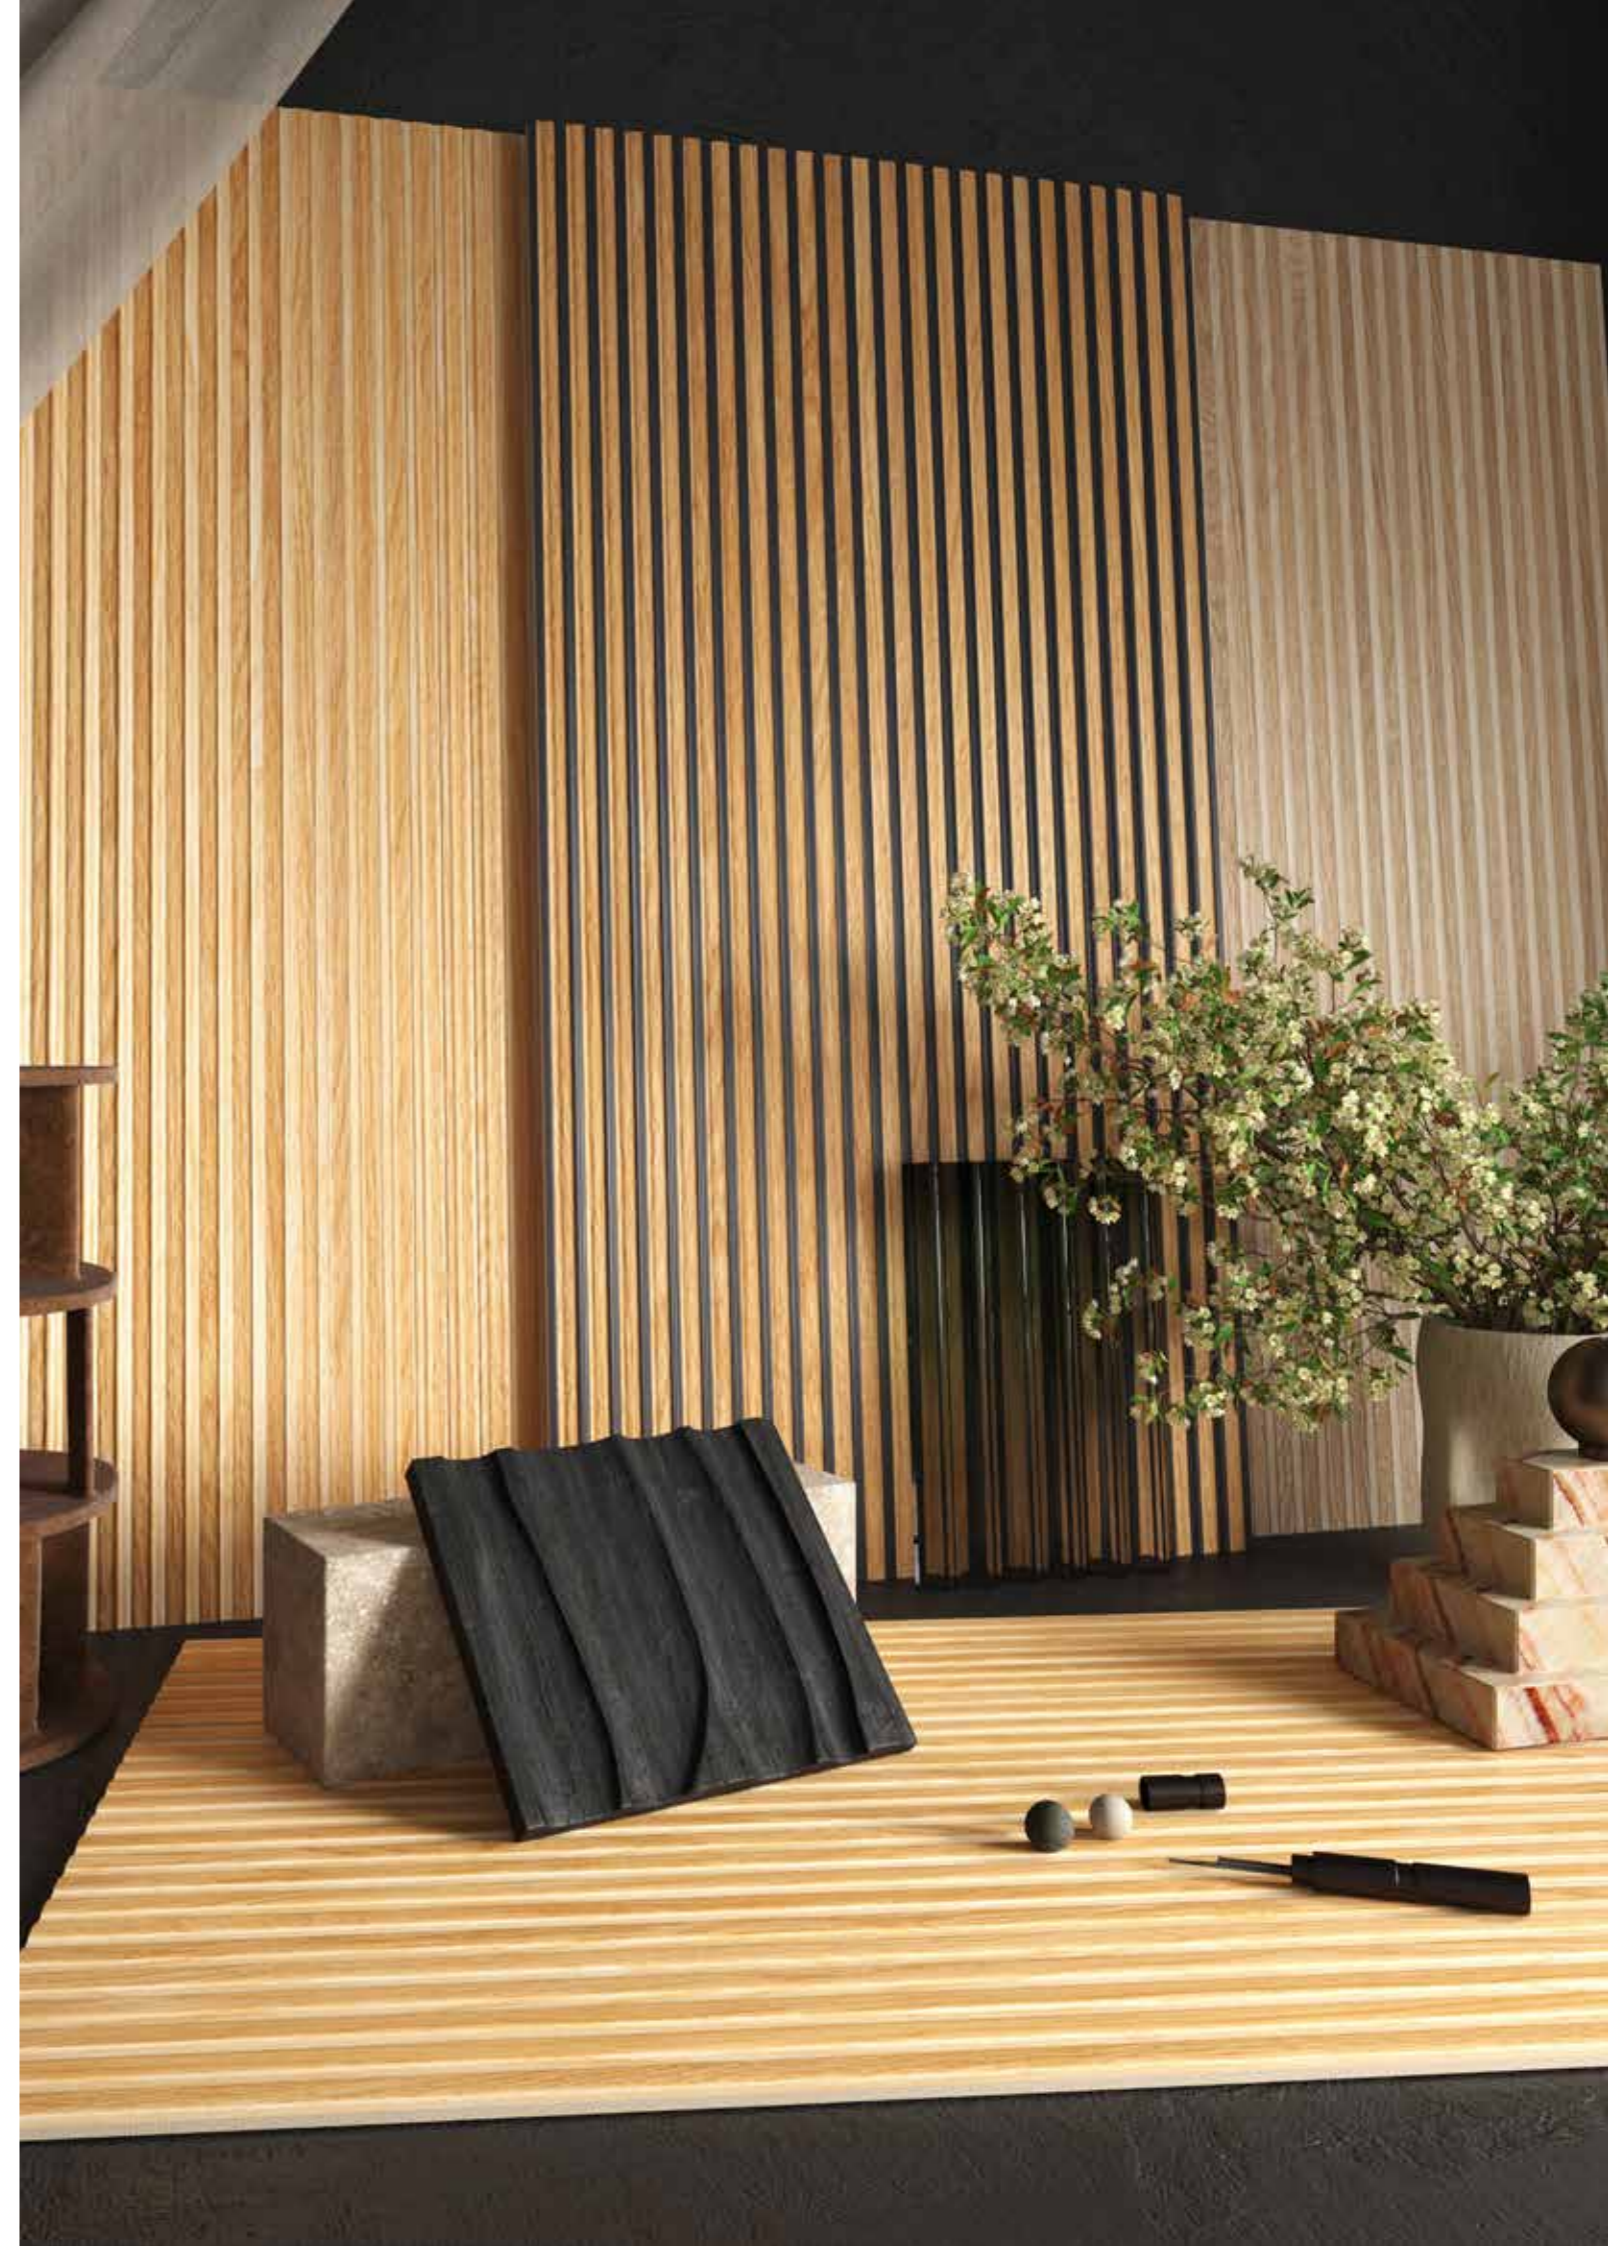

3D

The Cannè series interprets and highlights the material from which it takes its inspiration: slat wood wall. Regular grooves run the entire length of this porcelain tile, creating an undulating surface that varies in thickness and alternates the intensity of the colour. A decorative art that through discipline and balance designs walls, giving them a modern three-dimensionality.

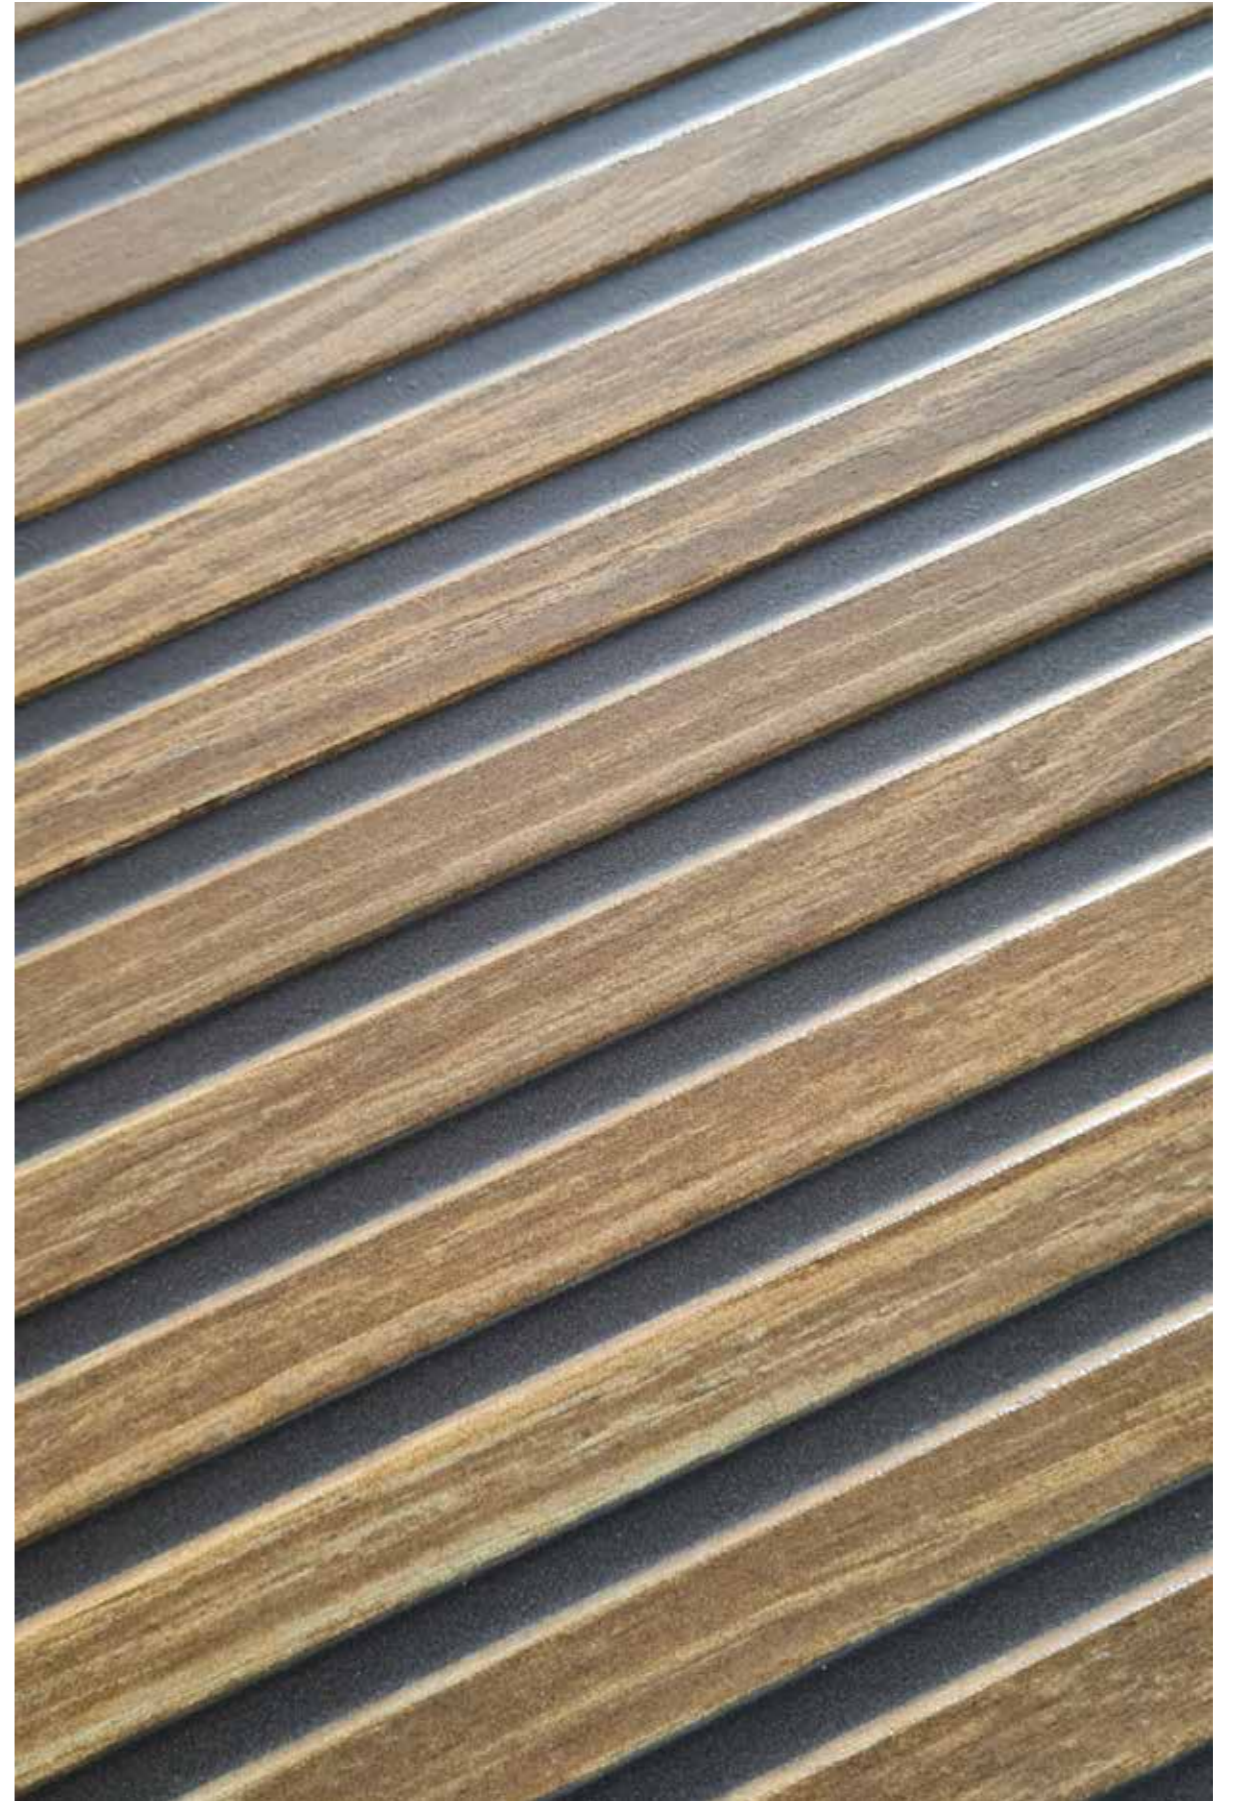



Ecrù

wall
Cannè - Ecrù 60x120

floor
Cruda - Grigio 60x120



wall
Cannè - Ecrù 60x120

floor
Cruda - Grigio 60x120

Ecrù



J92790
60x120 rett. (24"x48") rect.

“ Revolutionary ”



wall
Cannè - Ecrù 60x120

floor
Windsor - Beige 60x120



Honey

wall
Cannè - Honey 60x120

floor
Canova - Statuario 120x280

Honey



J92792
60x120 rett. (24"x48") rect.



wall
Cannè - Honey 60x120
floor
Cruda - Grigio 100x100



“Original”




wall
Cannè - Ecrù Black 60x120
floor
Cruda - Grigio 100x100



wall
Cannè - Ecrù Black 60x120

floor
Cruda - Grigio 60x120

Ecrù black

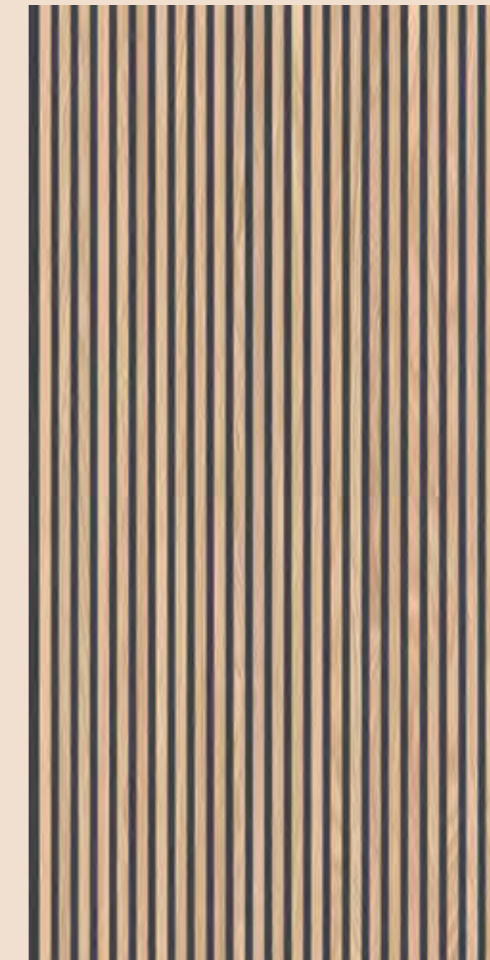

J92791
60x120 rett. (24"x48") rect.



wall
Cannè - Ecrù Black 60x120

floor
Cruda - Grigio 60x120

“ Eternal ”

Honey
black

wall
Cannè - Honey Black 60x120


floor
Loft - White 80x80



wall
Cannè - Honey Black 60x120

wall
Volcano - Decoro Singapore 120x280

Honey black

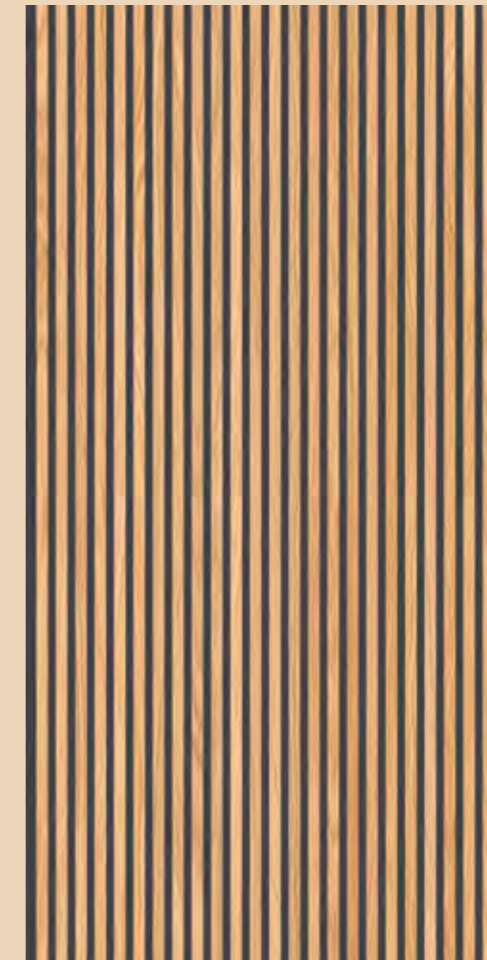

J92793
60x120 rett. (24"x48") rect.



wall
Cannè - Honey Black 60x120
Canova - Oxford Grey Full Lappato 120x280

floor
Cruda - Grigio 60x120

“Elegant”



wall
Cannè - Nut Black 60x120
Murales - Grey 120x280

floor
Cortina - Nut 24x150

Nut
black



Nut black



J92794
60x120 rett. (24"x48") rect.

wall
Cannè - Nut Black 60x120
Canova - Limestone 120x280

floor
Murales - Grey 120x280



“Versatile”

wall
Cannè - Nut Black 60x120
Cruda - Bianco 60x120

floor
Cruda - Antracite 60x120

The image features a background of vertical wood-grain patterns in various shades of brown and tan. A solid, dark brown horizontal band runs across the middle of the image. On the right side of this band, there is a white-bordered box containing the text.

Cannè
Series Summary

ecrù




J92790
60x120 rett.
(24"x48") rect.

honey




J92792
60x120 rett.
(24"x48") rect.

ecrù black

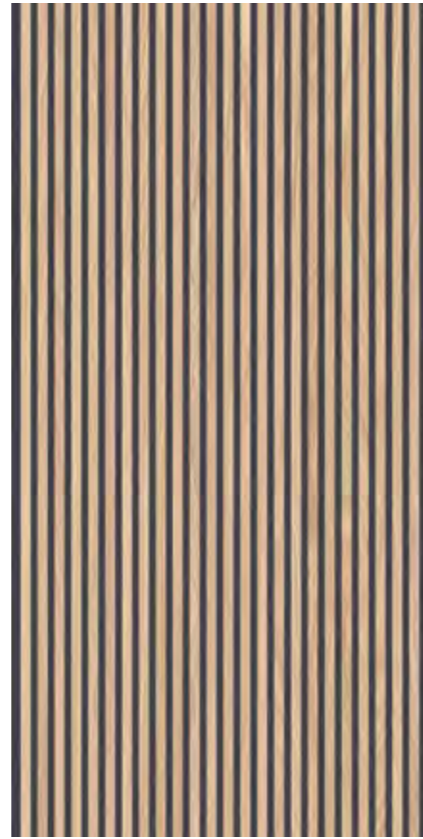

J92791
60x120 rett.
(24"x48") rect.

honey black

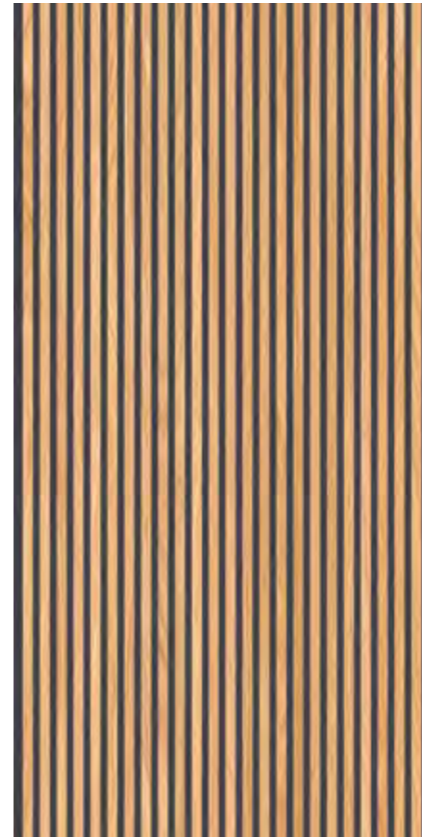

J92793
60x120 rett.
(24"x48") rect.

nut black



J92794
60x120 rett.
(24"x48") rect.



60x120 rett.
(24"x48") rect.




Quarter Round
60x2,5
(24"x1")

	ECRÙ	J92790	J92852
	HONEY	J92792	J92853
	ECRÙ BLACK	J92791	J92851
	HONEY BLACK	J92793	J92851
	NUT BLACK	J92794	J92851
	SPESSORE THICKNESS	8,5 mm	12 mm
	KG/M²	19,32	-
	PZ/BOX	2	12
	M²/BOX	1,44	-
	BOX/PALLET	32	-
	M²/PALLET	46,08	-
	KG/PALLET	890,56	-
	PRICE CODE	■ M431	● P148

INSTALLATION TIPS

Items with graphic clearance among different slabs up to 3 mm.

min. 2 mm
max 3 mm

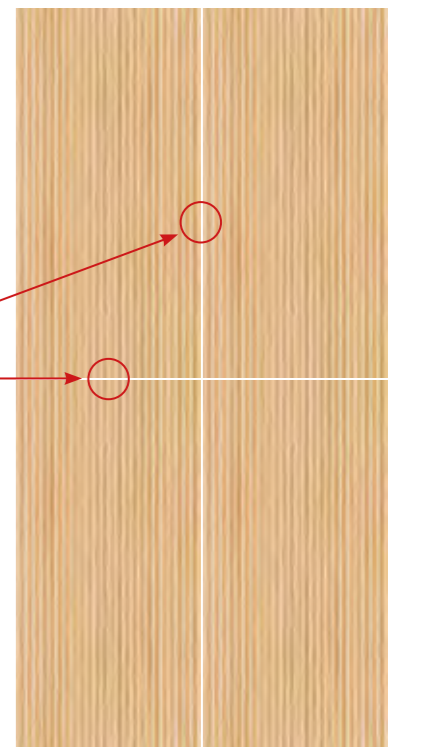

< 0,15%



A · HA · LA



OK














7



Porcelain tiles

ISO 13006 - G - BIa (E ≤ 0,5%) UNI EN 14411 - GL -

SPECIFICATION		TEST METHODS	FIXED VALUE			
	Caratteristiche dimensionali Dimensional characteristics Dimensions Dimensionale Eigenschaften			NAT	RET	LAP / RET
	Lunghezza e larghezza Length and width Longuer et largeu Länge und Breite	ISO 10545-2	± 0,6 %	Conforme Compliant Conforme Erfüllt	Conforme Compliant Conforme Erfüllt	Conforme Compliant Conforme Erfüllt
	Spessore Thickness Epaisseur Stärke		± 5 %			
	Rettilinearità degli spigoli Straightness of edges Rectitude des bords Rechteckigkeit der Ecken		± 0,5 %			
	Ortogonalità Rectangularity Orthogonalite Rechtwinkligkeit		± 0,5 %			
	Planarità (Curvatura del centro - curvatura dello spigolo - svergolamento) Planarity (Curvature of centre - curvature of edge - warpage) Planarite (Courbure du centre - courbure de l'arête - gauchissement) Ebenheit (Krümmung der Mitte - Krümmung der Kante - Verdrehung)		± 0,5 %			
Qualità della superficie Surface quality Qualite de la surface Qualität der Oberfläche	95% delle piastrelle esente da difetti visibili 95% of tiles show no visible defects 95% des carreaux sont dépourvus de défauts visibles 95% der Fliesen sind frei von sichtbaren Fehlern					
 Assorbimento d'acqua Water absorbtion Absorption d'eau Wasseraufnahme	ISO 10545-3	$E_w \leq 0,5 \%$		Conforme Compliant Conforme Erfüllt		
	Resistenza alla flessione Breaking modulus Resistance a la flexion Biegefestigkeit	ISO 10545-4	min. 35 N/mm ²		Conforme Compliant Conforme Erfüllt	
	Sforzo di rottura Modulus of rupture Charge de rupture Bruchlast		Spessore Thickness Epaisseur Stärke	≥ 7,5 mm: MIN. 1300 N < 7,5 mm: MIN. 700 N	Conforme Compliant Conforme Erfüllt	
	Resistenza alla abrasione della superficie di piastrelle smaltate Resistance to surface abrasion of glazed tiles Résistance à l'abrasion de la surface des carreaux émaillés Widerstand gegen abrieb der Oberfläche der glasierten Fliesen	ISO 10545-7	CLASSI 0-5		Secondo quanto dichiarato As declared Uivant les déclarations Gemäß den Angaben	
	Coefficiente di dilatazione termica lineare Thermal expansion coefficient Coefficient de dilatation thermique Wärmeausdehnungskoeffizient	ISO 10545-8	Metodo disponibile Available on request Methode disponible Verfügbares verfahren		$\leq 7 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$	
	Resistenza al cavillo Crazing resistance Resistance aux tresailures Haarrisse	ISO 10545-11	Richiesta Always tested Exigee Notwendig		Resistenti Resistant Résistants Widerstandsfähig	
	Resistenza agli sbalzi termici Thermal shock resistance Resistance aux écarts de temperature Temperaturwechselbeständigkeit	ISO 10545-9	Metodo disponibile Available on request Methode disponible Verfügbares verfahren		Resistenti Resistant Résistants Widerstandsfähig	
	Resistenza al gelo Frost resistance Resistance au gel Frostbeständigkeit	ISO 10545-12	Richiesta Always tested Exigee Notwendig		Resistenti Resistant Résistants Widerstandsfähig	
	Prodotti chimici ad uso domestico ed additivi per piscina Household chemicals and swimming pool water cleansers Produits chimiques courants et additifs pour piscine Chem.Produkte für den Haushaltsgebrauch und Zusatz für Schwimmbäder	ISO 10545-13	Metodo disponibile Available on request Methode disponible Verfügbares verfahren		Conforme Compliant Conforme Erfüllt	
	Acidi ed alcali a bassa concentrazione Acids and low concentration alkalis Acides et alcali a faible concentration Säuren und Alkali in geringer konzentration		Come dichiarato dal produttore As declared by the manufacturer Comme le déclare le producteur Wie vom hersteller erklärt	Resistenti Resistant Résistants Widerstandsfähig		
	Acidi ed alcali ad alta concentrazione Acids and high concentration alkalis Acides et alcali a forte concentration Säuren und Alkali in hoher konzentration		Metodo disponibile Available on request Methode disponible Verfügbares verfahren	Resistenti Resistant Résistants Widerstandsfähig		
	Resistenza alle macchie Stain resistance Resistance aux taches Fleckbeständigkeit	ISO 10545-14	CLASSE 3 MIN.		Resistenti Resistant Résistants Widerstandsfähig	
	Stabilità dei colori alla luce Colour stability to light Stabilité des couleurs a la lumiere Lichtechtheit der Farben	DIN 51094	Non devono presentare apprezzabili Variazioni di colore They do not have to show visible colour alteration Pas de modifications sensibles de couleur Weisen keine sichtbaren farbabweichungen auf		Conforme Compliant Conforme Erfüllt	
	Coefficiente di attrito (Scivolosità) Friction coefficient (Slip risk) Coefficient de frottement (Glissance) Reibungskoeffizient (Glätte)	ENI6165 ANNEX B (DIN 51130)	Dove richiesto If needed Si demande Nach anforderung		A richiesta Available on request Sur demande Auf Anfrage	
		ENI6165 ANNEX A (DIN 51097)				
		D.M. 236/89				
		B.C.R.				
		ANSI A 326.3:2021				

INSTALLATION AND CLEANING TIPS FOR RONDINE CERAMIC TILES

Foreword

The UNI EN 14411 standard - "Ceramic tiles - definition, classification, characteristics and marking" - aims to define and provide the terms, requirements and marking criteria for first choice ceramic tiles. Italcers S.p.A. constantly performs all the tests required by the above-mentioned standard on their tiles, using accredited laboratories. In addition, internal procedures for product quality control are constantly implemented.


Installation

The installers on site before installation must check the shade, size and choice of material, while during installation they must always take material from several boxes to achieve an ideal colour mix. They must also check the adequacy of the product for any defects already evident before installation, for which guarantees are excluded if they are reported after installation. The installers must use adhesives suitable for the various intended uses and follow the manufacturer's instructions on the packaging. They must carefully check that the substrate is stable, dry and cured, not frozen and not excessively hot. The adhesive must be applied perfectly so that no gaps are created between tile and substrate. The installers, especially for products with polished, satin-finished or lapped surfaces, must pay attention not to mark the material on the surface of use with pencils (graphite) or indelible markers. In order to carry out the cutting and shaping required by the works management, they must use special diamond discs and special tools, especially for porcelain stoneware. The size of the joint between tiles may vary depending on the size being used, the angle of the installation at right angles or diagonally, and the intended use. We recommend a minimum joint of 3 mm for non-ground products and a minimum joint of 2 mm for ground products. In case of continuous installation of rectangular sizes, the tile must be staggered by 6 cm and never more than 10 cm (Fig. 1). In large rooms it is necessary to place expansion joints regularly, while in small rooms it is sufficient to leave a slight clearance between tiled surface and perimeter walls, which is then covered by the skirting board.

Grouting and cleaning after installation

The use of pigment-coloured grouts or fillers must be done after a preliminary test. For polished, satin-finished or lapped porcelain stoneware surfaces, due to the microporosity caused by the abrasive action of the grinding wheels during processing, contrasting coloured grouts or fillers (white tiles and anthracite, red grout, etc.) cannot be used. When using cement grout, after grouting the tiles, while the grout is still fresh, any excess must be removed immediately and thoroughly with a sponge and plenty of water. Three to four days after installation, but no later than 10 days, carry out background cleaning using buffered acids in order to dissolve and completely remove all building site residues. It is equally important to rinse well until the washing water is clear. It is useful using liquid aspirators to remove dirty washing water and avoid moving it from one part to another. Even at the completion of the construction site, the installers must wash the floors with a solution of water and buffered acid to prevent inadequate or delayed removal of residues of the grout used for the joints from leaving halos that are difficult to remove.

Recommended detergents:



prima before **dopo after**

For flooring and wall cladding using formats with sides of over 60 cm, **Ceramica Rondine** recommends the use of **Raimondi** levelling spacers: **Levelling System** and **AndalSystem** which make it easy for you to:

- Ensure that the laid surface is entirely flat
- Maintain the desired position for each tile
- Reduce laying time

Levelling spacers for tiles enable you to create level flooring in a quick and easy way.
Take a look at the video on the **Ceramica Rondine** Youtube channel: www.youtube.com/user/RondineGroup

Variation index



Tiles with uniform appearance



Tiles with slight shade and graphic variation



Tiles with moderate shade and graphic variation



Tiles with huge variation of shade and graphic

Legend



Tiles specifically used for floors



Tiles specifically used for wall coverings



Tiles for dwelling houses



Tiles especially suitable for outdoor applications



Tiles suitable for low traffic public and commercial areas



Tiles suitable for heavy traffic public and commercial area

Contact us for more information



architectural@veronagroup.co.uk

0113 519 5004

www.verona-architectural.co.uk

Lumina,
Park Approach,
Thorpe Park,
Leeds LS15 8GB

