

Transforming spaces, elevating experiences

## Sweet Bars Collection







**01.** SIZES, COLOURS AND FINISHES pag. 4 **02.** GET INSPIRED pag.16 03. PACKING pag. 38 **04.** PRICE CODE pag. 39 **05.** TECHNICAL FEATURES pag. 40 **06.** TECHNICAL DRAWINGS pag. 42 **07.** RECOMMENDATIONS pag. 43



**01.** SIZES, COLOURS AND FINISHES **SWEET BARS** 

### **SB** 11,6x11,6cm / 4.6"x4.6"





SB White Gloss



SB Turques Gloss




SB Honey Gloss



SB Olive Gloss



SB Teal Gloss




SB Indigo Gloss



SB Biscuit Matt



SB Tan Matt

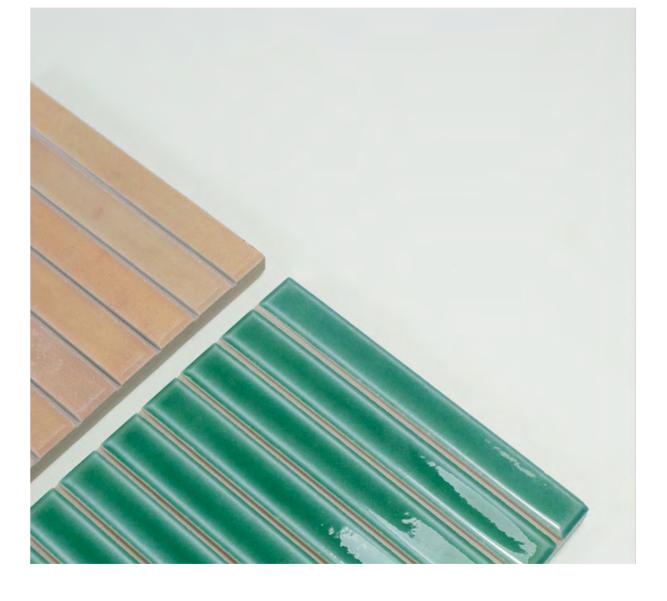

**SB** Tan Matt **SB** Turques Gloss



**01.** SIZES, COLOURS AND FINISHES SWEET BARS

**SB** 12,5x25 cm / 5"x10"







SB White Matt



SB Sand Matt



SB Grey Matt



SB Blush Matt




SB Sage Matt



SB Teal Matt



SB Berry Matt

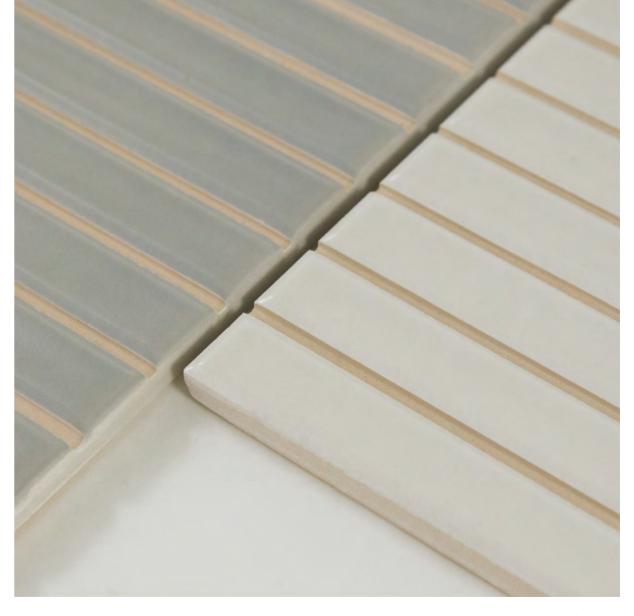

**SB** Grey Matt **SB** White Matt

| 9 8 |



**01.** SIZES, COLOURS AND FINISHES SWEET BARS

**SB** 12,5x25 cm / 5"x10"







SB Deep White



SB Greige



SB Mineral Grey



SB Coral



SB Fern



SB Royal Green



SB Peacock Blue



SB Ebony



**SB** Coral **SB** Deep White

12| | 13








**SB** Ebony **Fayenza** Square Ebony

**⋖ SB** Blush Matt


Floor Tiles: **Solid** Chalk S & Basalt XS

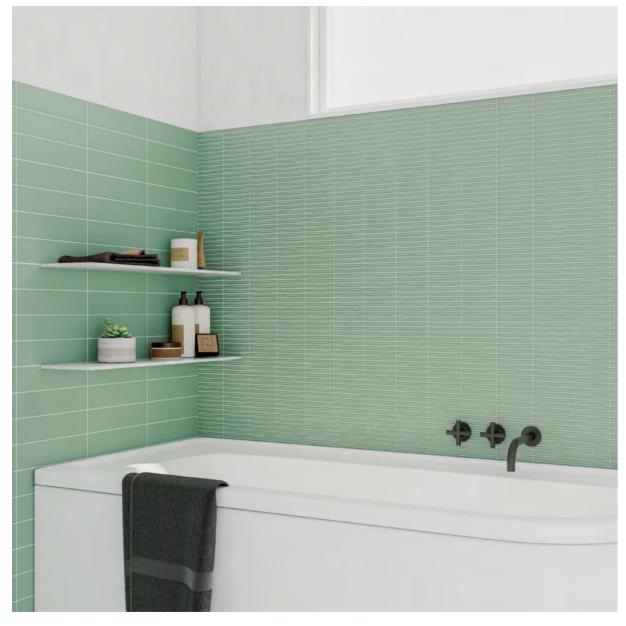

SB Sage Matt Grace Sage Matt

SB Greige ► Fayenza Greige

Floor Tiles: Bejmat Square Tan Matt

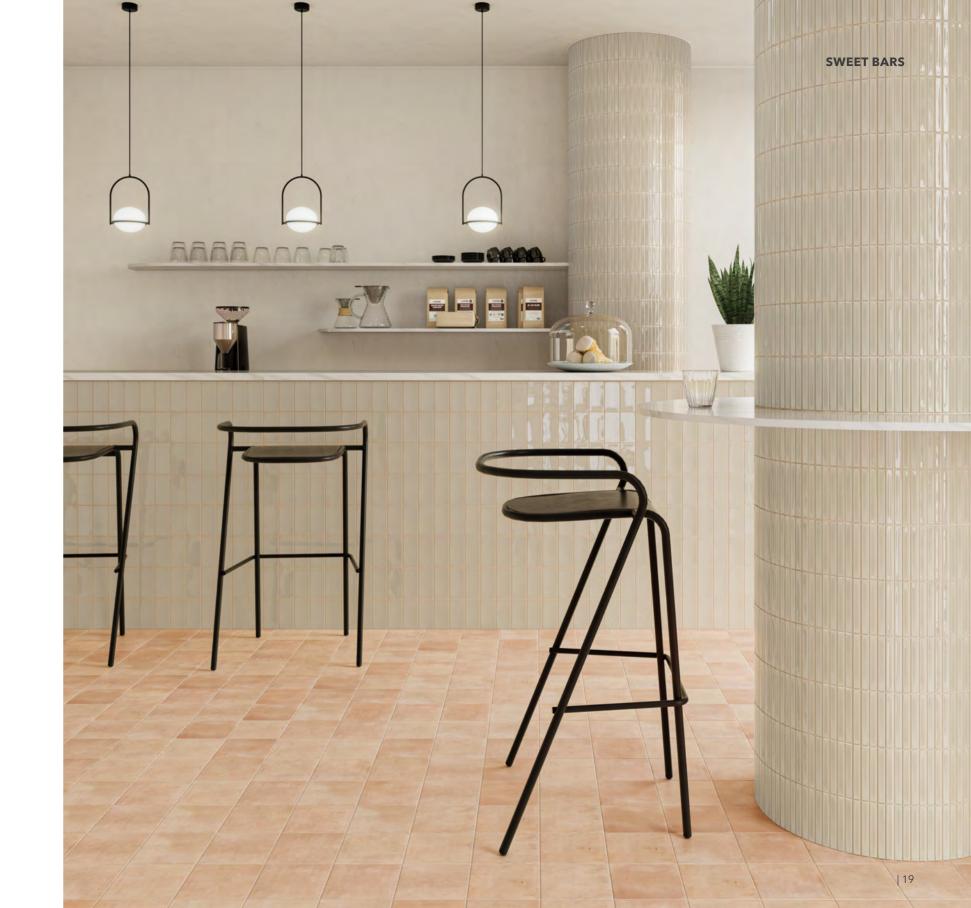





SB Indigo Gloss

**◆ SB** Grey Matt

Floor Tiles: Contempo Strip Oak (Love Affairs Collection)



SB Biscuit Matt

**SB** Tan Matt ► **SB** Teal Gloss





**DB** Deep White

SB Teal Matt

◆ Floor Tiles: Color Drops Off White



**02.** GET INSPIRED

Mary to be the first of the fir



**SB** Berry Matt

**SB** Mineral Grey ▶


Floor Tiles: Concrete Strip Ash Grey (Love Affairs Collection)





SB Fern ▶



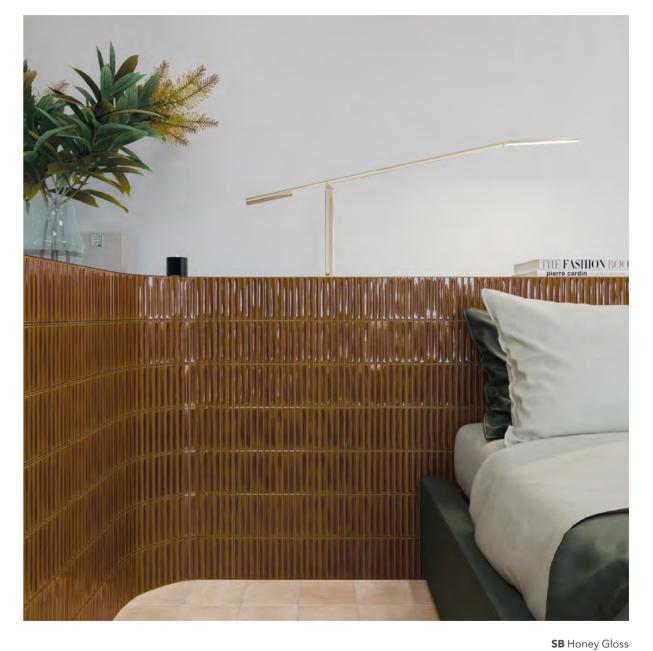

Floor Tiles: **Bejmat** Square Tan


**◆ SB** Peacock Blue

Floor Tiles: **Tesserae** Play Blanc

**02.** GET INSPIRED SWEET BARS






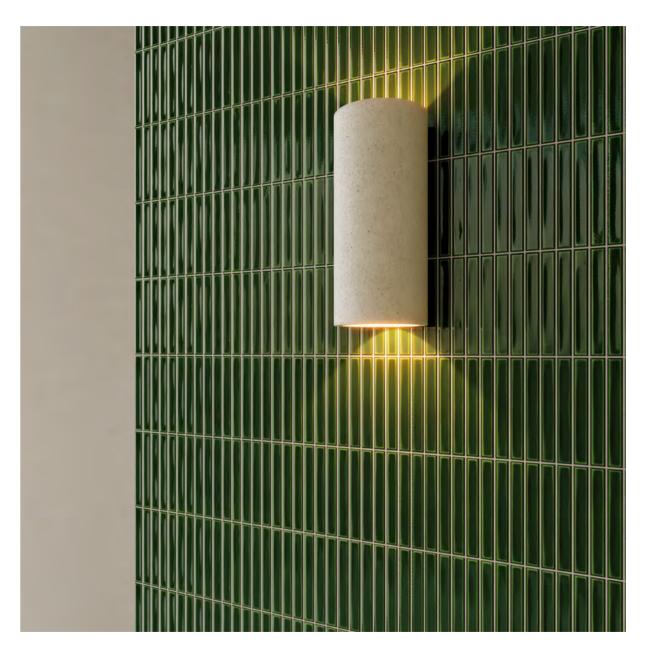

**SB** Olive Gloss



## HOW TO CREATE ROUNDED CORNERS

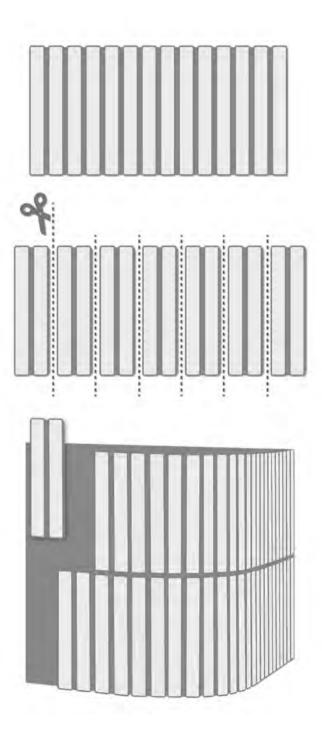

■ SB Royal Green Fayenza Square Royal Green


			кд 😂	M2		M2
Modelo	Formato (cm)	Piezas / Caja	Kg / Caja	m2 / Caja	Cajas / Palet	m2 / Palet
SB (PORCELAIN BODY)	11,6X11,6 cm	30	9,073 kg	0,400 m <sup>2</sup>	95	38,000 m <sup>2</sup>
SB (WHITE BODY)	12,5x25 cm	14	7,246 kg	0,438 m <sup>2</sup>	138	60,444 m <sup>2</sup>

			LB 🛞	FT2		FT2
Model	Format (in)	Pieces / Box	Lb/ box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
SB (PORCELAIN BODY)	4.6"x4.6"	30	20.002 lb	4.306 ft <sup>2</sup>	95	409.07 ft <sup>2</sup>
SB (WHITE BODY)	5"x10"	14	15.974 lb	4.715 ft <sup>2</sup>	138	650.67 ft <sup>2</sup>

MODEL/ MODELO	PRICE CODE / CODIGO TARIFA
SB BISCUIT MATT	W34
SB TAN MATT	W34
SB WHITE GLOSS	W34
SB TURQUES GLOSS	W41
SB HONEY GLOSS	W41
SB OLIVE GLOSS	W41
SB TEAL GLOSS	W41
SB INDIGO GLOSS	W41
SB WHITE MATT	W34
SB SAND MATT	W34
SB GREY MATT	W34
SB BLUSH MATT	W34
SB SAGE MATT	W34
SB TEAL MATT	W34
SB BERRY MATT	W34
SB DEEP WHITE	W34
SB GREIGE	W34
SB MINERAL GREY	W34
SB CORAL	W34
SB FERN	W34
SB ROYAL GREEN	W34
SB PEACOCK BLUE	W34
SB EBONY	W34

Porcelain tiles whith water absorption B Ia $\leq 0.5\%$ for interior and exterior fl oors and walls.					
F	EATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN	NORMA		
$\uparrow \hspace{-1mm} \rule{0mm}{2mm}$	Dimensional Features	116 mm +/- 0,6% x 116 mm +/- 0,6%	UNE-EN ISO 10545-2:1998		
	Water absorption	≤ 0,5%	UNE-EN ISO 10545-3:1997		
$\left[\begin{array}{c c} \downarrow \\ \uparrow & \uparrow \end{array}\right]$	Modulus of rupture and breaking strength	Minimum 35 N/mm² Individual Minimum 32 N/mm²	UNE-EN ISO 10545-4:2012		
₩	Crazing resistance	Pass	UNE-EN ISO 10545-11:1997		
	Household products resistance	GA	UNE-EN ISO 10545-13:1998		
	Chemical resistance	GHA (Matt & White Gloss) GLB (Gloss) GHB (Gloss)	UNE-EN ISO 10545-13:1998		
	Stain resistance	5	UNE-EN ISO 10545-14:1998		
Р	Porcelain Body	-			

Technical features for Dry-Pressed ceramic tiles with water absorption BIII (Eb >10%)					
F	EATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN	NORMA		
	Dimensional Features	125 mm +/- 0,75 mm x 250 mm +/- 0,75mm	UNE-EN ISO 10545-2:1998		
	Water absorption	>10%	UNE-EN ISO 10545-3:1997		
1 1	Modulus of rupture and breaking strength	Thickness ≥ 7,5 mm mínimo 12 N/mm² Thickness < 7,5 mm mínimo 15 N/mm²	UNE-EN ISO 10545-4:2012		
₩	Crazing resistance	Pass	UNE-EN ISO 10545-11:1997		
	Household products resistance	GA	UNE-EN ISO 10545-13:1998		
	Chemical resistance	GHA	UNE-EN ISO 10545-13:1998		
	Stain resistance	5	UNE-EN ISO 10545-14:1998		
W	White Body	-			

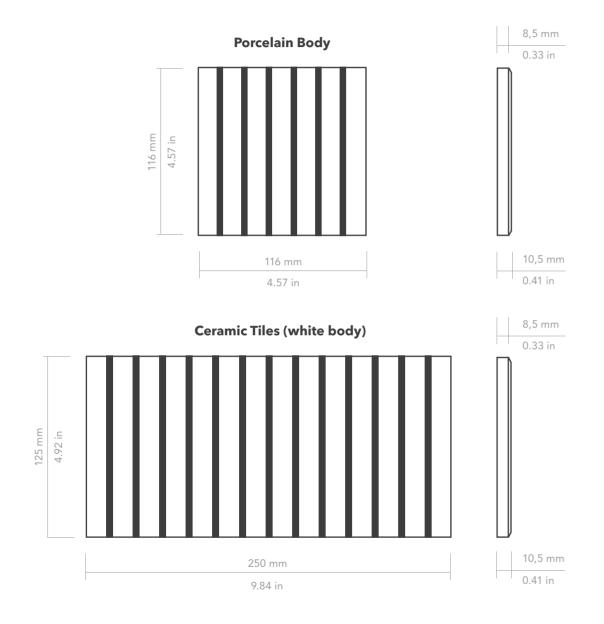

#### WARNING!

The size of the piece may vary depending on the colour. We do not recommend using compositions that mix different colours.

#### **WAREHOUSING**

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

#### **TILE FIXING**

To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

Due to the nature of the material there may be dimensional variations between pieces. Therefore, all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems.

For an optimal result that enhances the mosaic effect, we recommend using 1,5 mm (0.06") of joint, as well as a joint color that contrasts with the tone of the piece.

We do not recommend using a grout color similar to the piece.

#### MAINTENANCE AND CLEANING

Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes.

As a general guideline, powder dertergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

#### **WARNING!**

Due to the glaze specifications of colours: SB Turques Gloss, SB Honey Gloss, SB Olive Gloss, SB Teal Gloss and SB Indigo Gloss; It is strongly recommended to avoid using these products on kitchen countertops or any other surface where the tiles might be in contact with food.

# Contact us for more information



architectural@veronagroup.co.uk 0113 519 5004

www.verona-architectural.co.uk

Lumina, Park Approach, Thorpe Park, Leeds LS15 8GB





