



Transforming
spaces, elevating
experiences

Beat Collection



Beat

Echo of nature

9 mm 120×120/48"×48" R Matt-Pro 120×120/48"×48" R C2 GRIP 60×120/24"×48" R Matt-Pro 60×120/24"×48" R C2 GRIP 60×120/24"×48" R Ribbed 60×60/24"×24" R Matt-Pro 60×60/24"×24" R C2 GRIP 30×60/12"×24" R Matt-Pro 30×60/12"×24" R C2 GRIP	9 mm 180×240/72"×96" R Matt-Pro Kit Linear · 2pcs size 80×120cm/32"×48" · 2pcs size 60×120cm/24"×48" · 2pcs size 40×120cm/16"×48" 119×119/47"×47" Matt-Pro Kit Carved · 1pc size 80×80cm/32"×32" · 2pcs size 40×80cm/16"×32" · 1pc size 40×40cm/16"×16"	20 mm OUT2.0 60×120/24"×48" R	
--	---	---	---

Concept	2
---------	---

Highlights	14
Multiformato: Kit Carved	14
Multiformato: Kit Linear	18
3D Wall Coverings: Ribbed	22

Gallery	24
---------	----

Features	36
----------	----


The complete range	40
--------------------	----

Gres porcellanato
Porcelain stoneware
Grès cérame fin vitrifié
Feinsteinzeug
Porseleingres
Gres porcelánico



The ancient variability of nature transforms into a surface with a strong personality where different types of stones coexist. We've reinterpreted a millennia-old material with a fresh, contemporary perspective to bring the grandeur of the mineral universe into spaces.

Natural inspiration and modern character

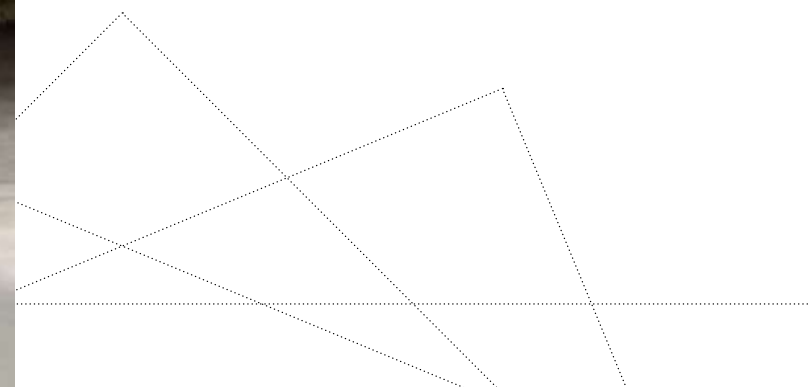








Beige 120×120/48"×48" R Matt-Pro

Natural traces and graphic signs enrich the background, alternating between light and dark areas, creating a composition that overall displays balance through nuanced chromatic transitions. With five colors inspired by nature offering warm and cool tones (white, almond, beige, grey, mud), four sizes ensuring maximum versatility (120×120, 60×120, 60×60, 30×60), and two finishes both anti-slip (Matt-Pro, C2 Grip with applied texture) catering to different performance needs, Beat is a comprehensive collection adaptable to various styles and suitable for all types of projects.

Balanced aesthetics in a complete range

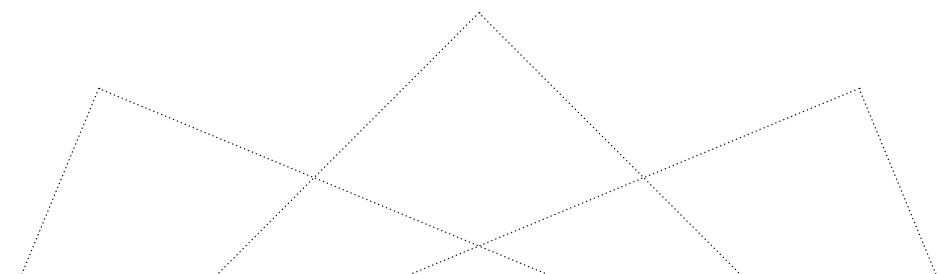



Almond 120×120/48"×48" R Matt-Pro



1

Pebbles of various sizes and shapes give character and three-dimensionality.

2


Subtle color transitions create a balanced and harmonious surface.

3

Deep crevices and light scratches provide extreme realism.

4

Gentle chiaroscuros add depth and movement.

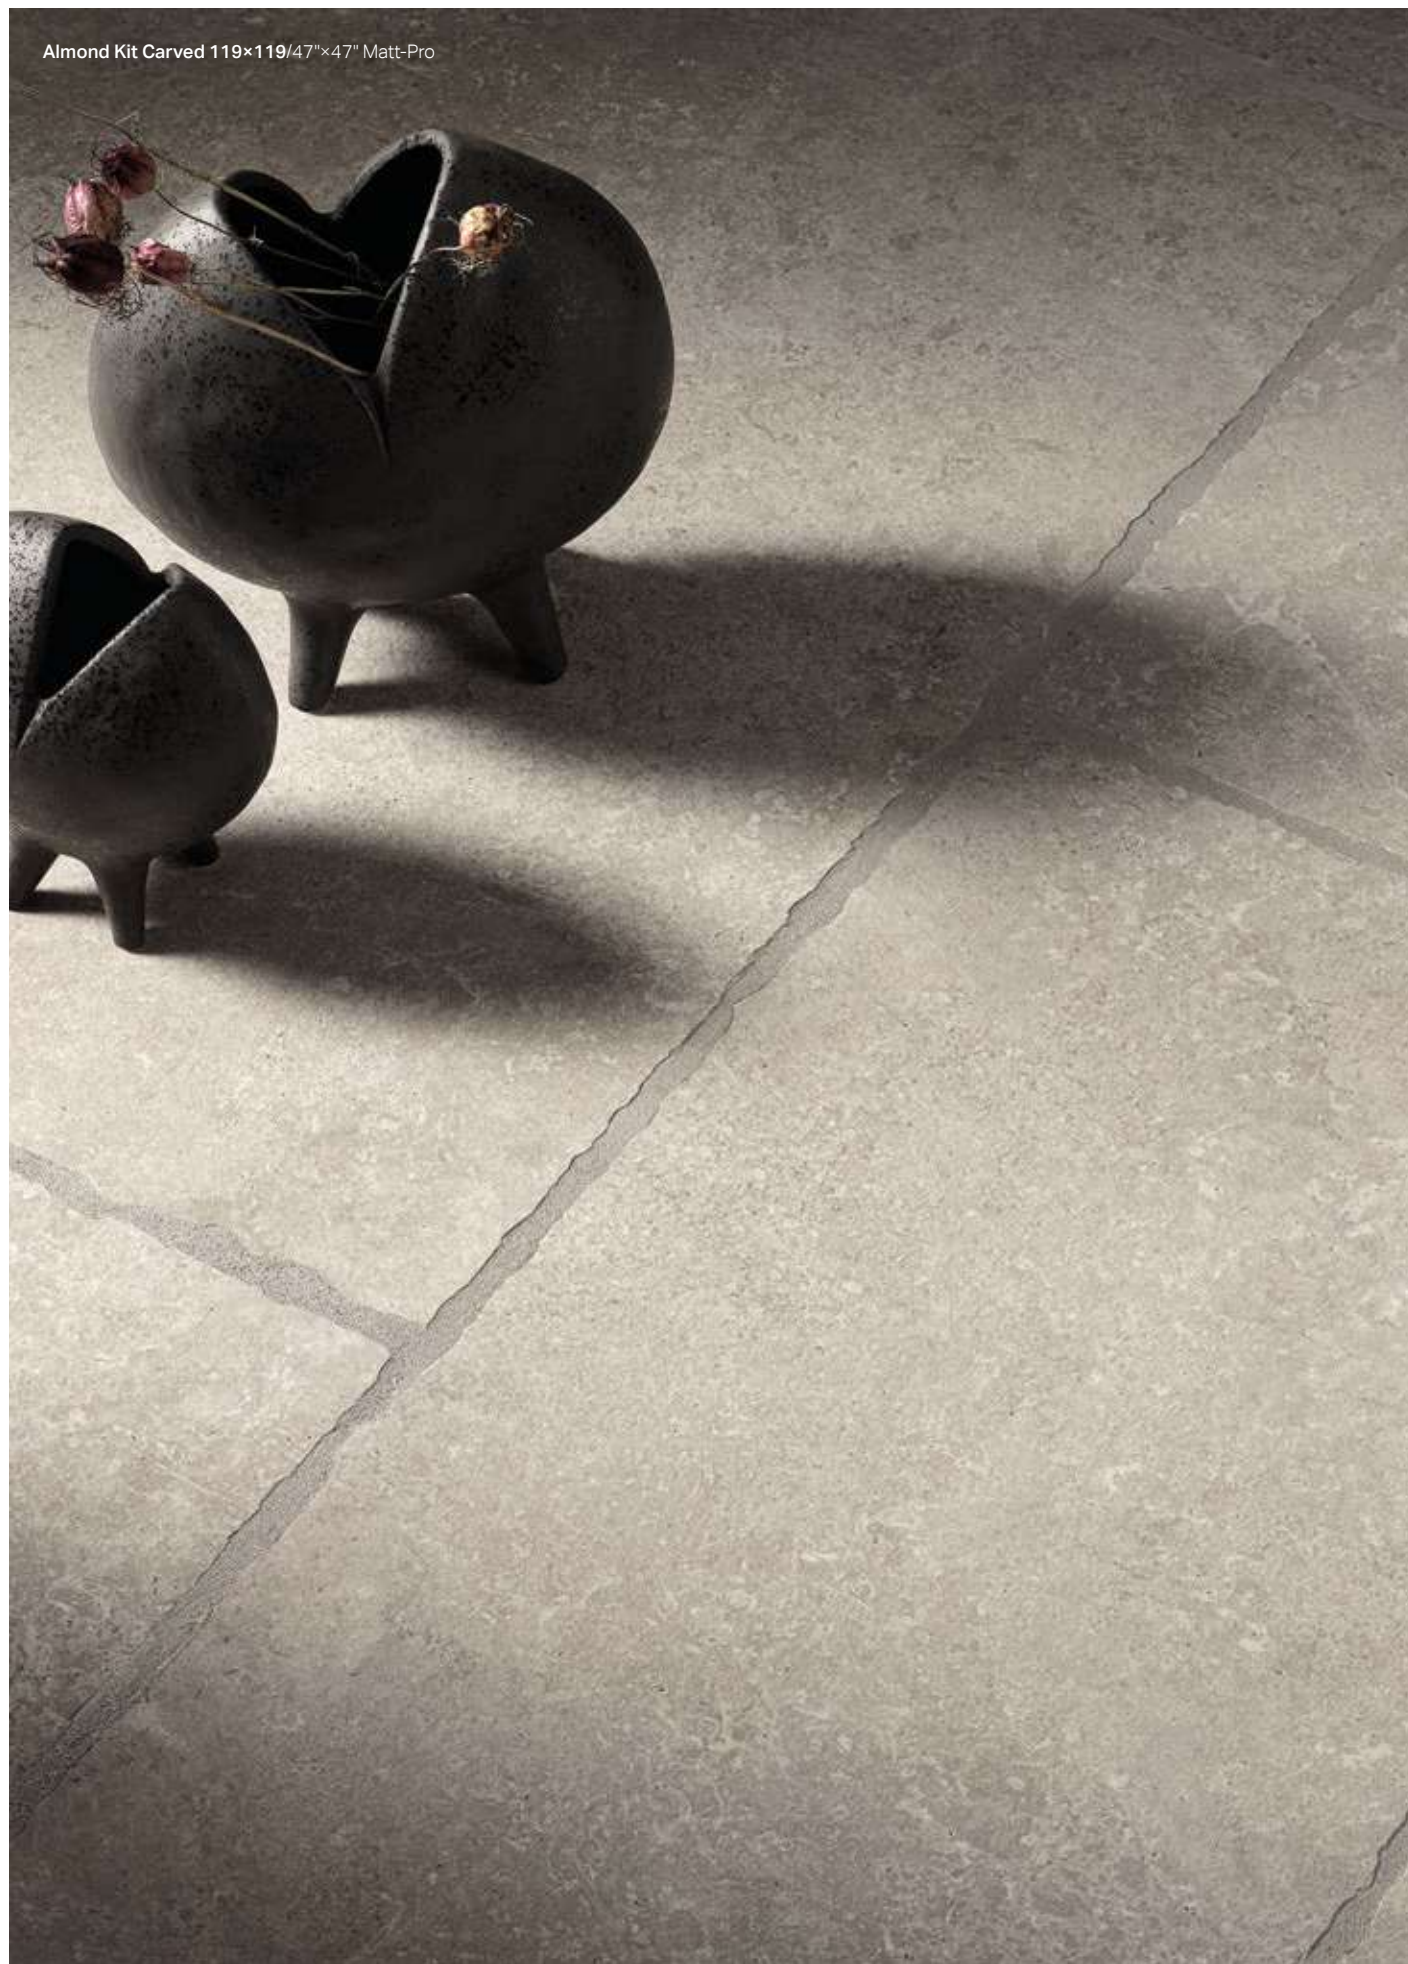

The multiformat kit consists of three elements of different sizes (80×80 + 40×80 + 40×40) that, when combined, offer numerous laying solutions. The edge features a special treatment making each piece unique and distinct from the others. This “carved” profile is a novelty for Refin and represents a significant advantage merging aesthetics and functionality, as it is less prone to chipping, ensuring ease of installation.


The multiformat Carved kit




- Jagged and irregular edge effect
- Industrial process simulating random hammering combining technology and craftsmanship
- Increased resistance to chipping and ease of installation

Available in all collection colors, the grout, appearing wider compared to the rectified edge, can be chosen tone-on-tone for a sober, traditional style or in contrast for a more modern pairing.

Schemi di posa/Laying sketches/
Schémas de pose/Modulverlegungsbeispiele/
Legschema/Esquemas de colocaciòn

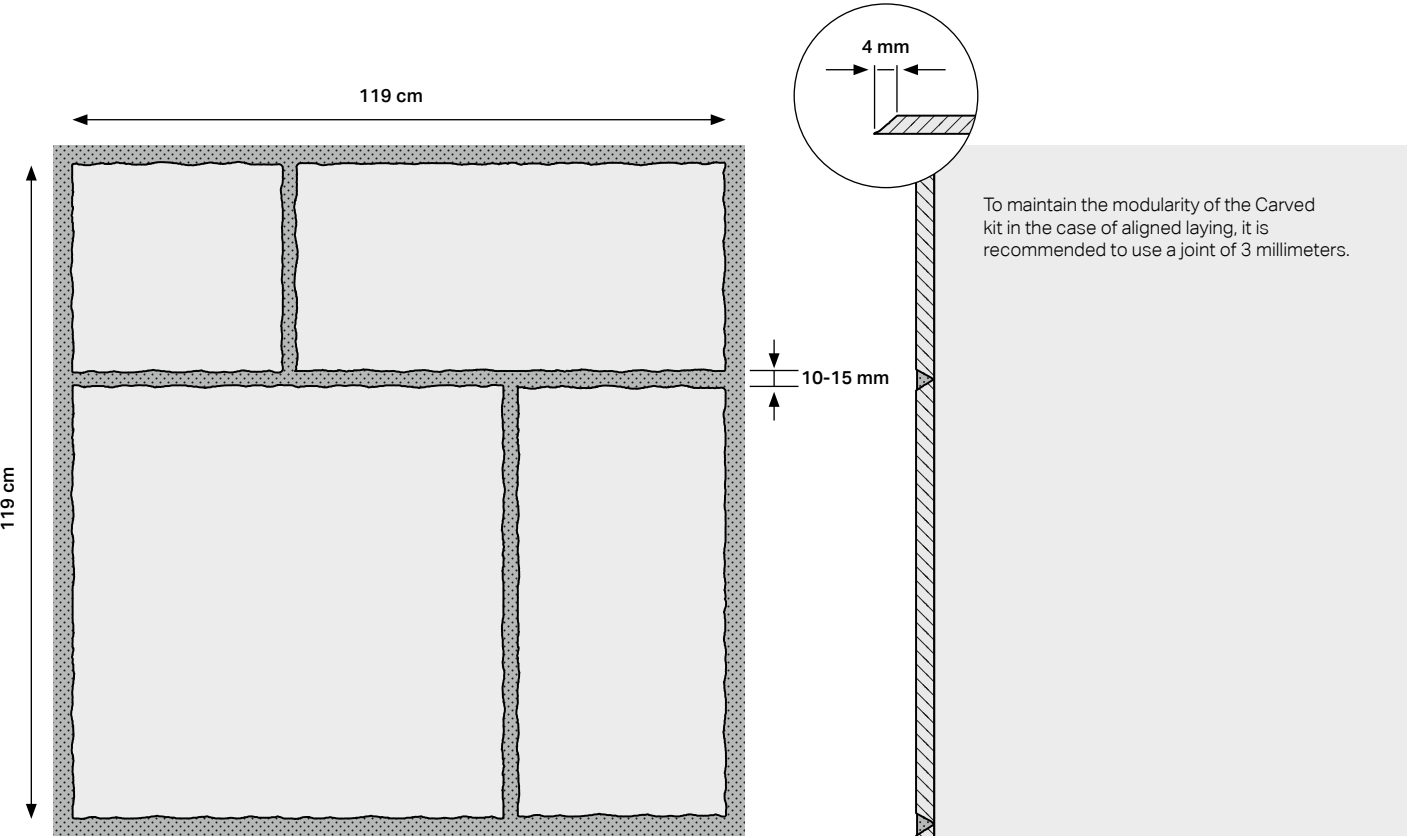

Kit Carved 119×119/47"×47"

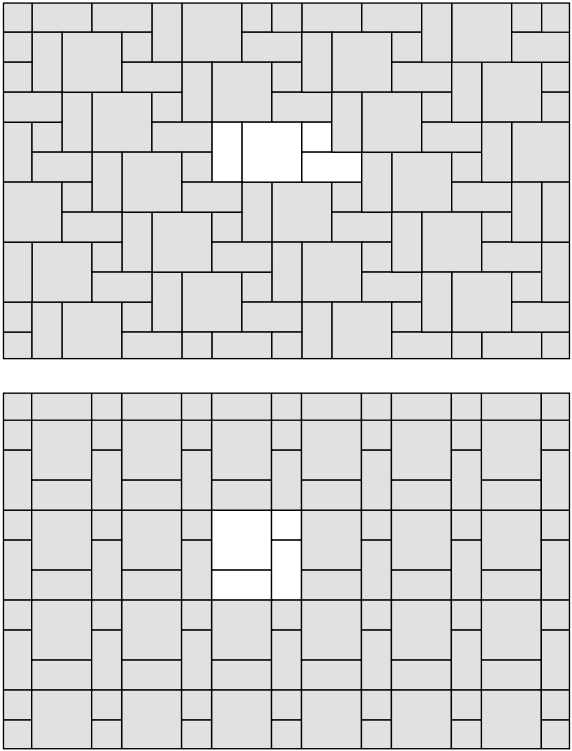

The multiformat kit is also offered with rectified edges, in all five shades of Beat. In this version, the three elements, mixable both on the floor and on the wall, have larger dimensions (80×120 + 60×120 + 40×120) that inspire compositions of contemporary taste.

The multiformat Linear kit





Beige Kit Linear 180×240/72"×96" R Matt-Pro



Laying sketches

Kit Linear 180×240/72"×96"

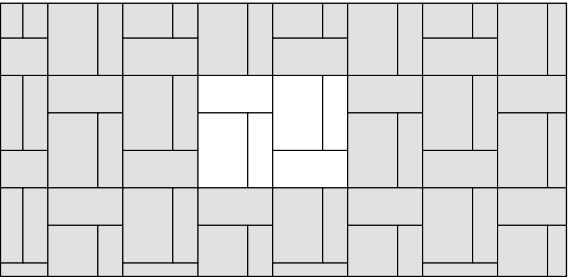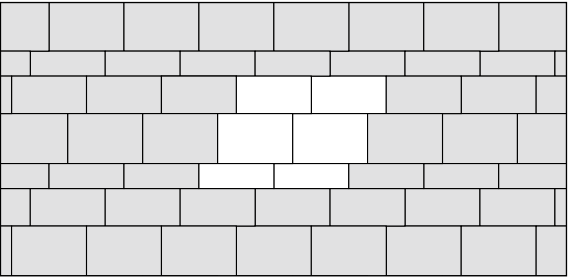



With its textile reflection effect, Ribbed is characterized by pronounced three-dimensionality made possible by the 3Deep technique, overlaying a specially designed graphic to recreate shading and depth. Refin has developed this innovative process – perfectly combining graphics, surface, and structure – to maximize the visual impact of the material in every light condition: 3Deep enhances depth and volume, perceptible from all angles horizontally and vertically.

The three-dimensionality of Ribbed

Mud 120×120/48"×48" R Matt-Pro — Mud Ribbed 60×120/24"×48" R — White Ribbed 60×120/24"×48" R
White 60×120/24"×48" R Matt-Pro — Cortina Natural 25×150/10"×60" R



White 120×120/48"×48" R Matt-Pro — 60×120/24"×48" R Matt-Pro — Tamashi Pepper 25×150/10"×60" R









Grey Mosaico 30×30/12"×12" R



Grey 120×120/48"×48" R Matt-Pro



V3
Moderate



White
120×120/48"×48" R C2 GRIP
120×120/48"×48" R Matt-Pro
60×120/24"×48" R C2 GRIP
60×120/24"×48" R Matt-Pro
60×60/24"×24" R C2 GRIP
60×60/24"×24" R Matt-Pro
30×60/12"×24" R C2 GRIP
30×60/12"×24" R Matt-Pro

RF04
RE79
RG20
RG14
RG30
RG25
RG40
RG35



Almond
120×120/48"×48" R C2 GRIP
120×120/48"×48" R Matt-Pro
60×120/24"×48" R C2 GRIP
60×120/24"×48" R Matt-Pro
60×120/24"×48" R OUT2.0
60×60/24"×24" R C2 GRIP
60×60/24"×24" R Matt-Pro
30×60/12"×24" R C2 GRIP
30×60/12"×24" R Matt-Pro

RE94
RE75
RG16
RG10
RN23
RG26
RG21
RG36
RG31



Beige
120×120/48"×48" R C2 GRIP
120×120/48"×48" R Matt-Pro
60×120/24"×48" R C2 GRIP
60×120/24"×48" R Matt-Pro
60×60/24"×24" R C2 GRIP
60×60/24"×24" R Matt-Pro
30×60/12"×24" R C2 GRIP
30×60/12"×24" R Matt-Pro

RF01
RE76
RG17
RG11
RG27
RG22
RG37
RG32



Grey
120×120/48"×48" R C2 GRIP
120×120/48"×48" R Matt-Pro
60×120/24"×48" R C2 GRIP
60×120/24"×48" R Matt-Pro
60×120/24"×48" R OUT2.0
60×60/24"×24" R C2 GRIP
60×60/24"×24" R Matt-Pro
30×60/12"×24" R C2 GRIP
30×60/12"×24" R Matt-Pro


RF02
RE77
RG18
RG12
RN24
RG28
RG23
RG38
RG33



Mud
120×120/48"×48" R C2 GRIP
120×120/48"×48" R Matt-Pro
60×120/24"×48" R C2 GRIP
60×120/24"×48" R Matt-Pro
60×60/24"×24" R C2 GRIP
60×60/24"×24" R Matt-Pro
30×60/12"×24" R C2 GRIP
30×60/12"×24" R Matt-Pro

RF03
RE78
RG19
RG13
RG29
RG24
RG39
RG34

V3
Moderate

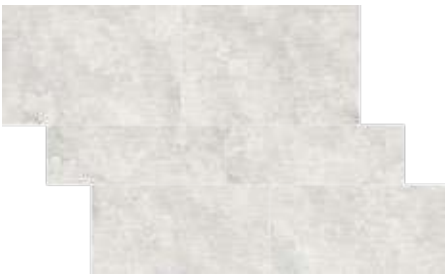

White
Kit Linear
180×240/72"×96" R Matt-Pro



Almond
Kit Linear
180×240/72"×96" R Matt-Pro



Beige
Kit Linear
180×240/72"×96" R Matt-Pro




Grey
Kit Linear
180×240/72"×96" R Matt-Pro



Mud
Kit Linear
180×240/72"×96" R Matt-Pro

Kit Linear 180×240 cm/72"×96" (1 kit = 4,320 m²)



Set per la posa multiformato composto da: /
Multi-format laying set consisting of: /
Set de pose multiformat composé de: /
Multiformat Verlegeset bestehend aus: /
Multiformat legset bestaande uit: /
Set de colocación multiformato compuesto por:

- 2pcs size 80×120cm/32"×48"
- 2pcs size 60×120cm/24"×48"
- 2pcs size 40×120cm/16"×48"

Articoli forniti in imballi separati.
Non vendibili singolarmente. /
Items provided in separate packaging. Not sold individually. /
Articles fournis dans des emballages séparés. Non vendus à l'unité. /
Artikel werden in separaten Verpackungen geliefert. Nicht einzeln erhältlich. /
Items worden geleverd in afzonderlijke verpakkingen. Niet los verkrijgbaar. /
Artículos suministrados en embalajes separados. No se venden individualmente.

Per codici e imballi, chiedere al proprio referente commerciale. /
For codes and packaging, please consult your sales representative. /
Pour les codes et l'emballage, veuillez consulter votre représentant commercial. /
Für Codes und Verpackung, wenden Sie sich bitte an Ihren Vertriebsmitarbeiter. /
Voor codes en verpakking, raadpleeg uw verkoopvertegenwoordiger. /
Para códigos y embalaje, consulta a tu representante de ventas.

V3
Moderate



White
Kit Carved



Almond
Kit Carved



Beige
Kit Carved




Grey
Kit Carved



Mud
Kit Carved

Kit Carved 119×119 cm/47"×47" (1 kit = 1,416 m²)



Set per la posa multiformato composto da:/
Multi-format laying set consisting of:/
Set de pose multiformat composé de:/
Multiformat Verlegeset bestehend aus:/
Multiformat legset bestaande uit:/
Set de colocación multiformato compuesto por:

- 1pc size 80×80cm/32"×32"
- 2pcs size 40×80cm/16"×32"
- 1pc size 40×40cm/16"×16"

Articoli forniti in un unico imballo. Non vendibili singolarmente. /
Items provided in a single package. Not sold individually. /
Articles fournis dans un seul emballage. Non vendus à l'unité. /
Artikel werden in einer einzigen Verpackung geliefert. Nicht einzeln verkaufbar. /
Items worden geleverd in één enkele verpakking. Niet los verkrijgbaar. /
Artículos suministrados en un solo embalaje. No se venden por separado.



V3
Moderate



White
Ribbed



Almond
Ribbed



Beige
Ribbed



Grey
Ribbed



Mud
Ribbed

Mosaici/Mosaics/Mosaiques/
Mosaiken/Mozaïeken/Mosaicos



White
Mosaico



Almond
Mosaico



Beige
Mosaico



Grey
Mosaico



Mud
Mosaico

The complete range

Colours



V3
Moderate

Formati
Sizes
Formats
Formate
Formaten
Formatos

Tiles
± 9 mm


120×120/48"×48" R
C2 GRIP / Matt-Pro

60×120/24"×48" R
C2 GRIP / Matt-Pro

60×60/24"×24" R
C2 GRIP / Matt-Pro


30×60/12"×24" R
C2 GRIP / Matt-Pro

White



± 20 mm
OUT 2.0

60×120/24"×48" R



3D Wall Coverings
± 9 mm

Ribbed 60×120/24"×48" R


Mosaics
± 9 mm

Mosaico 30×30/12"×12" R

Almond



Beige



Grey




Mud



Trim tiles




Battiscopa 	7×60/2⁷/₈"×24" R	
	Almond	RE89
	Beige	RE90
	Grey	RE91
	Mud	RE92
	White	RE93

Packing

	pcs × box	m² / m × box	kg × box	box × pallet	m² × pallet	kg × pallet
120×120/48"×48"	2	2,8800	59,00	20	57,60	1 180,00
60×120/24"×48"	2	1,4400	29,50	35	50,40	1 032,50
60×120/24"×48" OUT2.0	1	0,7200	32,50	35	25,20	1 137,50
60×60/24"×24"	3	1,0800	21,36	40	43,20	854,40
30×60/12"×24"	7	1,2600	24,50	40	50,40	980,00
Kit Linear 180x240/72"×96"	1	4,3200				
Kit Carved 119×119/47"×47"	1	1,4161	29,20	34	48,15	992,80
30×30/12"×12" Mosaico	11	0,9900	19,00	18	17,82	342,00
7×60/2 ⁷ / ₈ "×24" Battiscopa	10	6,0000	9,00	70	420,00	630,00

Color shading



The moderate chromatic variation and the veining of the product is an intrinsic feature to re-create the randomness and richness of the colour shading of natural stones to which the collection is inspired. For these reasons, we recommend installing the product choosing tiles from different boxes in order to guarantee a variable and natural random effect of the finished surface. Due to these intrinsic features of the product, the colours represented in this catalogue must only be considered an example of the many possible colour shades.

Features

C2 GRIP, OUT2.0



UNI EN ISO 10545-14

Classe 5 / Class 5



DIN EN 16165:2023
Annex B
(previously DIN 51130)

R11



DIN EN 16165:2023
Annex A
(previously DIN 51097)

A+B+C



BS EN 16165:2021
Annex C
(previously BS 7976-2:2002)

PTV₉₆ ≥ 36 Wet



B.C.R.A.
Rep. CEC/81

Conforme / Compliant



ANSI A326.3 (BOT 3000)
Test Method

wet DCOF ≥ 0.55

MATT-PRO



UNI EN ISO 10545-14

Classe 5 / Class 5



DIN EN 16165:2023
Annex B
(previously DIN 51130)

R10



DIN EN 16165:2023
Annex A
(previously DIN 51097)

A+B



BS EN 16165:2021
Annex C
(previously BS 7976-2:2002)

PTV₉₆ ≥ 36 Wet



B.C.R.A.
Rep. CEC/81

Conforme / Compliant



ANSI A326.3 (BOT 3000)
Test Method

wet DCOF ≥ 0.50

Almond 120×120/48"×48" R Matt-Pro



**Certified
quality**

Ceramiche Refin SpA
is ISO 9001 certified.
The entire production
process is subject
to strict controls for
guaranteed high-quality
materials.

Ceramiche Refin
reserves the right to
change the products
presented in this
catalogue at any time.

All the intellectual
property rights of this
catalogue are reserved
in all countries.
Translation, reproduction
in print or electronic
form, and adaptation,
in whole or in part,
using any means
(including microfilm
and photocopy formats)
of the contents
of the said catalogue
constitute a violation
of REFIN SpA's
copyright. The products
featured in the
photographs in this
catalogue are protected
by current industrial
property legislation.

The information
contained in this
catalogue is correct
to the best of our
knowledge, but is not to
be construed as legally
binding. We reserve the
right to make change
as and when production
requirement under
them necessary.
Weight, colours and Size
are subject to the usual
variation expected in fi
red ceramic products.
Colours shown are as
close to the real colour
as the limitation of the
printing process will allow.
While being the result of
carefully effected studies
and tests, these
suggestions and
instructions should be
considered purely
indicative. The technical
characteristics given in
this catalogue cancel and
replace all previous
characteristics in the
general catalogue and
in the range catalogues.

Legenda/Legend/Légende/Legende/Legende/Leyenda
Gres Fine Porcellanato – EN 14411 ISO 13006 Gruppo Bla Annex G

		Regulation	Required standards			Refin Value
	Dimensioni/Sizes/Dimensions/ Abmessungen/ Afmetingen/ Dimensiones	UNI EN ISO 10545/2		Non rettificato Not rectified	Rettificato* Rectified*	
			Lunghezza e larghezza/Length and width/Longueur et largeur/Länge und Breite/Lengte en breedte/ Longitud y anchura	± 0,6 % max 2 mm	± 0,3 % max 1mm	Conforme Compliant
			Spessore/Thickness/Epaisseur/ Stärke/Dikte/Grosor	± 5 % max 0,5 mm	± 5 % max 0,5mm	Conforme Compliant
			Rettilinearità spigoli/Linearity/ Rectitude des arêtes/ Kantengeradheit/Rechtheid kanten/ Rectitud de los lados	± 0,5 % max 1,5mm	± 0,3 % max 0,8mm	Conforme Compliant
			• Ortogonalità/Wedging/ Orthogonalité/Rechtwinkligkei/ Haaksheid hoeken/Ortogonalidad	± 0,5 % max 2mm	± 0,3 % max 1,5mm	Conforme Compliant
	Assorbimento acqua / Water absorption / Absorption d'eau / Wasseraufnahme / Waterabsorptie / Absorción de agua	UNI EN ISO 10545/3	≤ 0,5 %			≤ 0,2%
	Resistenza alla flessione / Flexual Strenght/Résistance à la flexion / Biegefestigkeit / Buigvastheid / Resistencia a la flexión	UNI EN ISO 10545/4	≥ 35 N/mm²			Conforme Compliant
			S ≥ 1300 N (thickness ≥ 7,5 mm)			Conforme Compliant
	Coefficiente di restituzione (COR) / Coefficient of restitution (COR) / Coefficient de restitution (COR) / Schlagfestigkeit (COR) / Restitutiecoëfficiënt (COR) / Coeficiente de restitución (COR)	UNI EN ISO 10545/5	Valore consigliato ≥ 0,55/ Recommended value ≥ 0,55/ Valeur recommandée ≥ 0,55/ Empfohlener Wert ≥ 0,55/ Aanbevolen waarde ≥ 0,55/ Ralor recomendado ≥ 0,55			Conforme Compliant
	Resistenza all'abrasione profonda / Deep abrasion resistance / Resistance à l'abrasion / Widerstand gegen Tiefenverschleiß / Weerstand tegen afschuren / Resistencia a la abrasión profunda	UNI EN ISO 10545/6	≤ 175 mm³ Solo per piastrelle non smaltate / Only for unglazed tiles			Conforme Compliant
	Resistenza all'abrasione/ Abrasion resistance/ Résistance à l'abrasion/ Abriebbeständigkeit/ Weerstand tegen afschuring/ Resistencia a la abrasión	UNI EN ISO 10545/7	PEI Solo per piastrelle smaltate / Only for glazed tiles			
	Coefficiente di dilatazione termica lineare / Coefficient of thermal linear expansion / Coefficient de dilatation thermique linear / Linearer Wärmeausdehnungskoeffizient / Lineaire thermische uitzetting / Coeficiente de dilatación termica linear	UNI EN ISO 10545/8	Metodo di prova disponibile / Tests method available / Methode dessai disponible / Verfügbares / rüfverfahren / Testmethode beschikbaar / Método de prueba disponible			≤ 7 10 ⁻⁶ °C ⁻¹
	Resistenza agli sbalzi termici / Thermal shock resistance / Resistance aux ecarts de temperature / Temperaturwechselbeständigkeit / Temperatuurswisselingen / Resistencia al choque térmico	UNI EN ISO 10545/9	Nessun campione deve presentare difetti visibili / No sample must show visible defects / Aucun échantillon ne doit présenter des défauts visibles / Kein Exemplar darf sichtbare Schäden aufweisen / Geen enkel monster mag zichtbare gebreken vertonen / Ninguna muestra debe presentar defectos visibles			Conforme Compliant
	Dilatazione all'umidità / Moisture expansion / Dilatation à l'humidité / Feuchtigkeitsausdehnung / Uitzetting door vocht / Dilatación por la humedad	UNI EN ISO 10545/10	Metodo di prova disponibile / Tests method available / Methode dessai disponible / Verfügbares / Prüfverfahren / Testmethode beschikbaar / Método de prueba disponible			≤ 0,02 % (0,2 mm/m)
	Resistenza al fuoco / Fire resistance / Résistance au feu / Brandverhalten / Brand weerstand / Resistencia al fuego	UNI EN ISO 13501-1	Dichiarare un valore / Declare a value Classe A1 oppure A _{fl} / Class A1 or A _{fl}			A1 _{fl}
	Resistenza al gelo / Frost resistance / Résistance au gel / Frostbeständigkeit / Vorstbestandheid / Resistencia a la helada	UNI EN ISO 10545/12	Resistenti/Resistant / Resistants / Widerstandsfähig / Weerbarstig / Resistentes			Conforme Compliant

Legenda/Legend/Légende/Legende/Legende/Leyenda
Gres Fine Porcellanato – EN 14411 ISO 13006 Gruppo Bla Annex G

		Regulation	Required standards	Refin Value
	Resistenza all'attacco chimico / Chemical resistance / Resistance à l'attaque chimique / Beständigkeit gegen Chemikalien / Chemische bestandheid / Resistencia al ataque químico	UNI EN ISO 10545/13		
	Resistenza ai prodotti chimici di uso domestico ed agli additivi per piscina / Resistance to household chemicals and swimming pool salts	UNI EN ISO 10545/13	Classe minima B (GB per piastrelle smaltate) / Minimum class B (GB for glazed tiles)	A
	Resistenza a basse concentrazioni di acidi e alcali / Resistance to low concentrations of acids and alkalis	UNI EN ISO 10545/13	Classe minima B (UB per piastrelle non smaltate) / Minimum class B (UB for unglazed tiles)	
			Dichiarare una classe / Declare a class	LA
			Metodo di prova disponibile / Tests method available	
	Resistenza alle macchie / Stain resistance / Insensibilité aux taches / Beständigkeit gegen Fleckenbildner / Substanzen / Weerstand tegen viekken / Resistencia a las manchas	UNI EN ISO 10545/14	UGL Dichiarare un valore / UGL Declare a value	Vedere interno See inside
			GL ≥ 3	
	Cessione di piombo e cadmio/ Lead and cadmium discharge/ Perte de plomb et cadmium/ Abgabe von Blei und Cadmium/ Ontdaan van lood en cadmium/ Cesión de plomo y cadmio	UNI EN ISO 10545/15	Valore dichiarato / Declared value	Al limite di rilevamento / Than instrument limit
	Indicazione di resistenza allo scivolamento / Assessment of slip resistance / Indication de la résistance au glissement / Bestimmung der Trittsicherheit / Indicatie voor de slipvastheid / Indicación de resistencia al deslizamiento	DIN EN 16165:2023 Annex B (previовsly DIN 51130)	Dichiarare un valore (R) / Declare a value (R)	Vedere interno See inside
		DIN EN 16165:2023 Annex A (previовsly DIN 51097)	Dichiarare un valore (A+B+C) / Declare a value (A+B+C)	Vedere interno See inside
		BS EN 16165:2021 Annex C (previовsly BS 7976-2:2002)	Dichiarare un valore / Declare a value	Vedere interno See inside
	Coefficiente di attrito dinamico / Measurement of dynamic coefficient of friction / Mesure du coefficient de frottement dynamique / Messung des dynamischen Reibungskoeffizienten / Meting van de dynamische wrijvingscoefficient / Coeficiente de rozamiento dinámico	B.C.R.A. Rep. CEC/81	Asciutto > 0,40 / Bagnato > 0,40	Vedere interno See inside
		DCOF ANSI A326.3 (BOT 3000) Test Method	Dichiarare un valore / Declare a value	Vedere interno See inside

* Per piastrelle rettangolari, che abbiano il lato maggiore L≥ 60 cm, e rapporto tra i lati ≥ 3, la misurazione della ortogonalità deve venire condotta solo sul lato corto.
For oblong tiles with L≥ 60 cm and ratio length/width L/W≥3, measurement of rectangularity only on short edges

Contact us for more information



architectural@veronagroup.co.uk

0113 519 5004

www.verona-architectural.co.uk

Lumina,
Park Approach,
Thorpe Park,
Leeds LS15 8GB

